


**SMA plug (male) / SMA jack (female) Straight Adaptor**  
**DC-18 GHz, VSWR  $\leq 1.2$**

**AD-A1A25D / 9XX-9X**

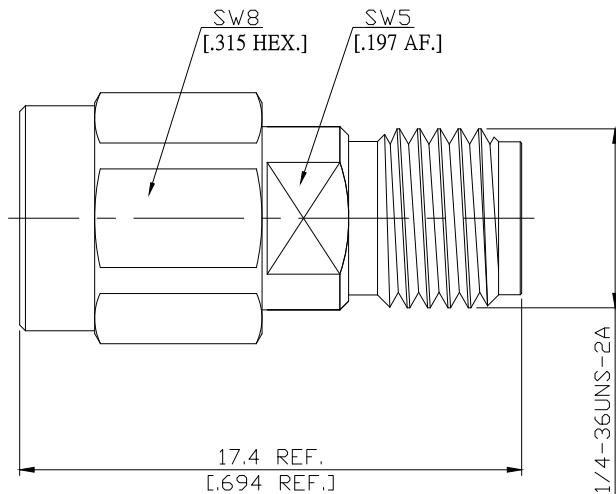

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

according to

IEC 60169-15; MIL-STD-348B/310

### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 18 GHz
VSWR (Return Loss)	$\leq 1.20$ ( $\geq 20.83$ dB)
Insertion Loss	$\leq 0.05 \times \sqrt{F}$ (GHz) dB
Insulation resistance	$\geq 5$ G $\Omega$
Center contact resistance	$\leq 3$ m $\Omega$
Outer contact resistance	$\leq 2$ m $\Omega$
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling	$\leq 200$ W @ 2 GHz
RF-leakage	$\geq 100$ dB up to 1 GHz
Dielectric Withstanding Voltage	1000 VRMS
RF High Potential Withstanding Voltage: (Tested at 5 MHz)	760 VRMS

### Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 $\mu$ inch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 $\mu$ inch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-  
Date:  
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)  
 Phone: +886-3-463-5095 / Fax: +886-3-463-5952  
 N-CAGE Code: SFKK0 / ISO9001 Certified

Page  
1/2

SMA pulg (male) / SMA jack (female) Straight Adaptor  
DC-18 GHz, VSWR  $\leq$  1.22

AD-A1A25D / 9XX-9X

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	$\geq 500$
Center contact captivation: axial	$\geq 27 \text{ N}$
radial	$\geq 3 \text{ Ncm}$
Coupling test torque	$\leq 1.7 \text{ Nm}$
Recommended torque	0.8 Nm to 1.1 Nm

## Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100