


SMA plug (male) / SMA R/P jack (female) Straight Adaptor  
DC-18 GHz, VSWR ≤ 1.20

## AD-A1A75A / 911-91

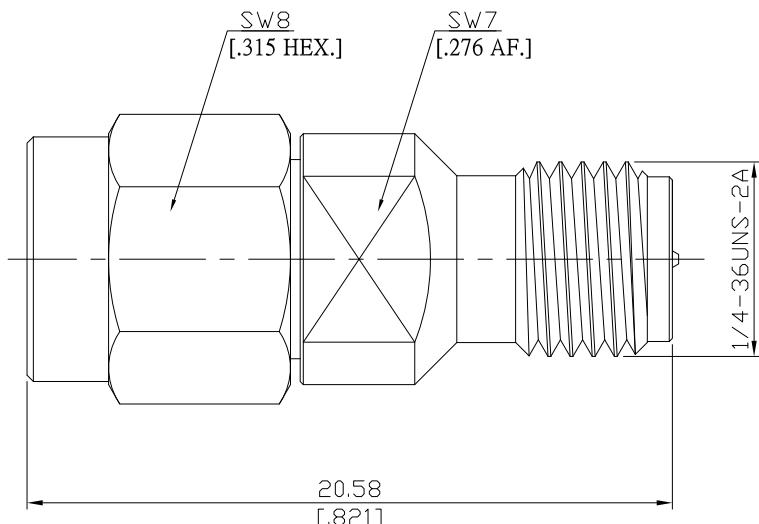

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

according to

IEC 60169-15; MIL-STD-348B/310

## Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 3 mΩ

Outer contact resistance

≤ 2 mΩ

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

## Material And Plating

## Piece Parts (SMA)

## Material

## Plating

Centre contact

Beryllium Cooper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

## Piece Parts (SMA)

## Material

## Plating

Centre contact

Beryllium Cooper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

SMA plug (male) / SMA R/P jack (female) Straight Adaptor  
DC-18 GHz, VSWR ≤ 1.20

## AD-A1A75A / 911-91

## Mechanical Data

|                                   |                  |
|-----------------------------------|------------------|
| Coupling mechanisms               | Screw-lock       |
| Mating cycles                     | ≥ 500            |
| Center contact captivation: axial | ≥ 27 N           |
| radial                            | ≥ 3 Ncm          |
| Coupling test torque              | ≤ 1.7 Nm         |
| Recommended torque                | 0.8 Nm to 1.1 Nm |

## Environmental Data

|                     |                                      |
|---------------------|--------------------------------------|
| Temperature Range   | -65 °C to +155 °C                    |
| Thermal shock       | MIL-STD-202, Method 107, Condition B |
| Corrosion           | MIL-STD-202, Method 101, Condition B |
| Vibration           | MIL-STD-202, Method 204, Condition D |
| Shock               | MIL-STD-202, Method 213, Condition I |
| Moisture resistance | MIL-STD-202, Method 106              |
| RoHS                | compliant                            |

## Packing

Single or 100