


SMA plug (male) / BMA jack (female) Adapter
 DC-26.5GHz VSWR1.15

AD-A1BA25A / 133-13

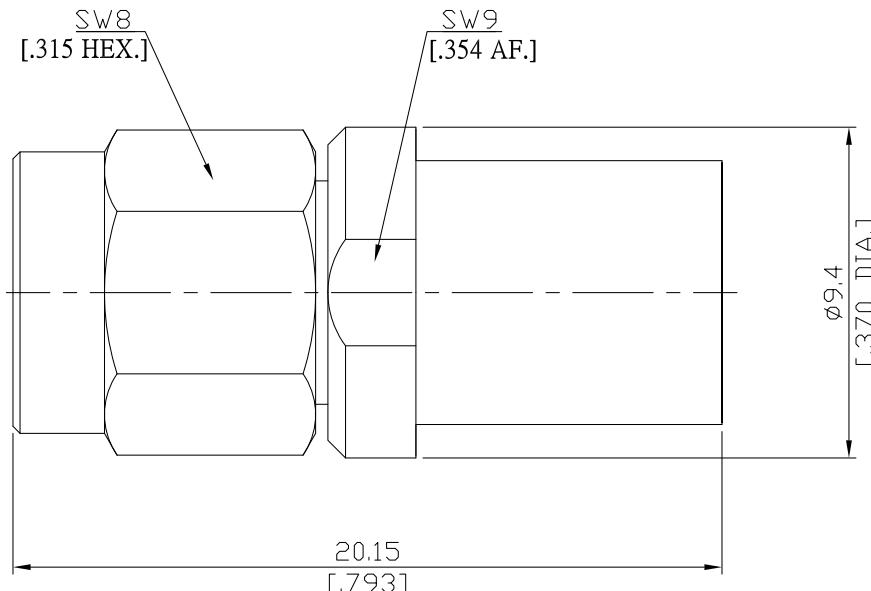

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

 Mechanically compatible with
 According to

 SMA Side
 3.5mm and 2.92mm
 IEC 61169-15, MIL-STD-348B/310

 BMA Side
 OSP and RPC-SP
 IEC 61169-33, MIL-STD-348B/326

Electrical Data

Impedance	50 Ω
Frequency	DC to 26.5 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.15 dB)
Insertion Loss	≤ 0.04 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Test Voltage (at sea level)	1000 V rms
Working Voltage (at sea level)	335 V rms
RF Leakage	≥ 85 dB up to 1 GHz

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (BMA)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	

SMA jack (female) / BMA jack (female) Adapter
DC-26.5GHz VSWR1.15

AD-A1BA25A / 133-13

Mechanical Data

Coupling Mechanisms	2.92mm Side	BMA Side
Mating Cycles	Screw-lock	Slide-on
Center Contact Captivation	≥ 500	≥ 1000
Coupling Test Torque	≥ 27 N	≥ 27 N
Recommended Torque	1.70 Nm max.	None
Engagement Force	0.9 Nm	None
Disengagement Force	None	≤ 13.5 N
Misalignment	None	≥ 2 N
	radial 0.15 mm min.	

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Standard	Single
Weight	N/A