


SMA male (male) / N jack (female)  
Panel 4 Hole Flange Mount Adapter, DC-11 GHz, VSWR ≤ 1.15

## AD-A1N25A-PF / H11-H3

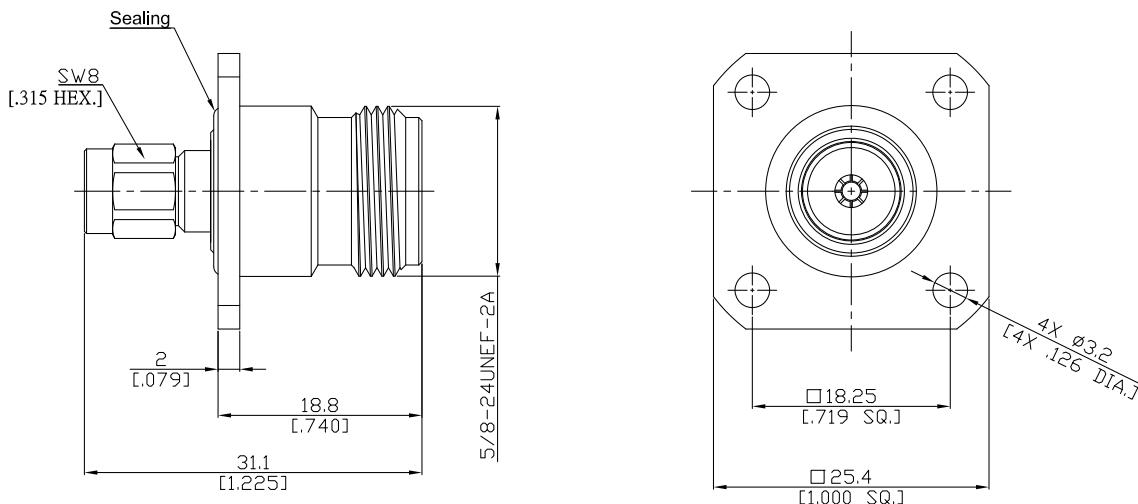

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

SMA according to

IEC 60169-15; MIL-STD-348B/310

N according to

IEC 60169-16; MIL-STD-348B/304

## Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.1 dB)

Insertion loss

≤ 0.04 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 3 mΩ, SMA side

≤ 1 mΩ, N side

Outer contact resistance

≤ 2 mΩ, SMA side

≤ 0.25 mΩ, N side

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

## Material And Plating

| Piece Parts (SMA) | Material        | Plating  |
|-------------------|-----------------|--|
| Centre contact    | Phosphor Bronze | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Body              | Brass           | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Insulator         | PTFE            |  |
| Gasket            | Silicone Rubber |  |
| Coupling nut      | Brass           | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Piece Parts (N)   | Material        | Plating  |
| Centre contact    | Phosphor Bronze | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Body              | Brass           | Copper-Tin-Zinc Alloy  |
| Insulator         | PTFE            |  |
| Gasket            | Silicone Rubber |  |

**SMA male (male) / N jack (female)**  
**Panel 4 Hole Flange Mount Adapter, DC-11 GHz, VSWR ≤ 1.15**

**AD-A1N25A-PF / H11-H3**

**Mechanical Data**

|                                  |                  |                  |
|----------------------------------|------------------|------------------|
| Coupling mechanisms              | SMA Side         | N Side           |
| Mating Cycles                    | Screw-lock       | Screw-lock       |
| Coupling nut retention           | ≥ 500            | ≥ 500            |
| Center Contact Captivation axial | ≥ 270 N          | ≥ 450N           |
| Coupling Test Torque             | ≥ 28 N           | ≥ 28 N           |
| Recommended Torque               | 1.7 Nm max.      | 1.70 Nm max.     |
|                                  | 0.8 Nm to 1.1 Nm | 0.7 Nm to 1.1 Nm |

**Environmental Data**

|                     |                                      |
|---------------------|--------------------------------------|
| Temperature Range   | -55°C to +155°C                      |
| Thermal shock       | MIL-STD-202, Method 107, Condition B |
| Corrosion           | MIL-STD-202, Method 101, Condition B |
| Vibration           | MIL-STD-202, Method 204, Condition D |
| Shock               | MIL-STD-202, Method 213, Condition I |
| Moisture Resistance | MIL-STD-202, Method 106              |
| RoHS                | compliant                            |

**Weight**

N/A

**Packing**

Single or 100