


SMA plug (male) / N jack (female)
Straight adaptor DC-12GHz VSWR 1.15

AD-A1N25A / HXX-HX

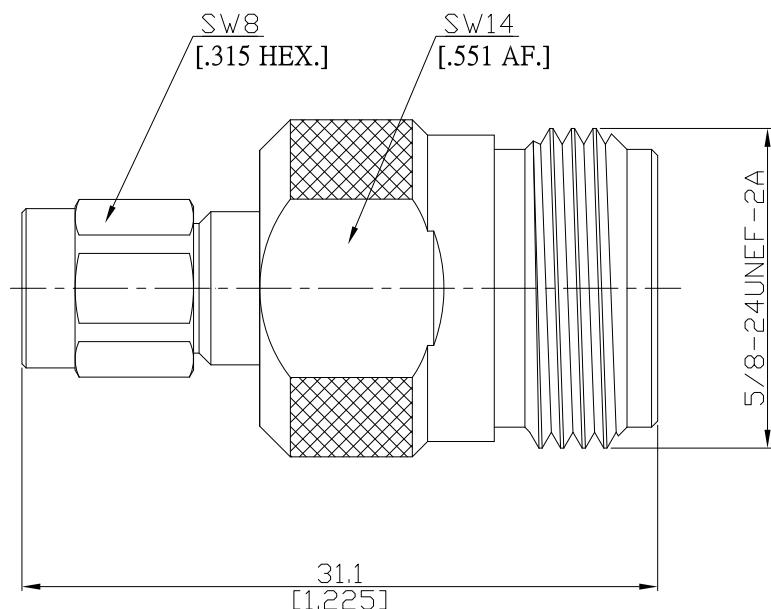

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMA according to	IEC 60169-15; MIL-STD-348B/310
N according to	IEC 60169-16; MIL-STD-348B/304

Electrical Data

Impedance	50 Ω	
Frequency	DC to 12 GHz	
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)	
Insertion loss	≤ 0.05 x √F (GHz) dB	
Insulation resistance	≥ 5 GΩ	
Center contact resistance	≤ 1 mΩ, N side	≤ 3 mΩ, SMA side
Outer contact resistance	≤ 0.25 mΩ, N side	≤ 2 mΩ, SMA side
Test voltage	1000 V rms	
Working voltage	480 V rms	
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz	
RF-leakage	≥ 100 dB up to 1 GHz	

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

SMA plug (male) / N jack (female)
Straight adaptor DC-12GHz VSWR 1.15

AD-A1N25A / HXX-HX

Mechanical Data

Coupling mechanisms	SMA side	N side
Mating cycles	Screw-lock	Screw-lock
Center contact captivation: axial	min. 500	min. 500
Coupling test torque	≥ 27 N	≥ 28 N
Recommended torque	1.70 Nm	1.70 Nm
	0.80 Nm to 1.10 Nm	0.70 Nm to 1.10 Nm

Environmental Data

Temperature Range	-5°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100