


SMA plug (male) / SMP plug (male) Limited Detent
 Adapter DC-26.5GHz, VSWR 1.29

AD-A1P1LD5A / 1XX-1X

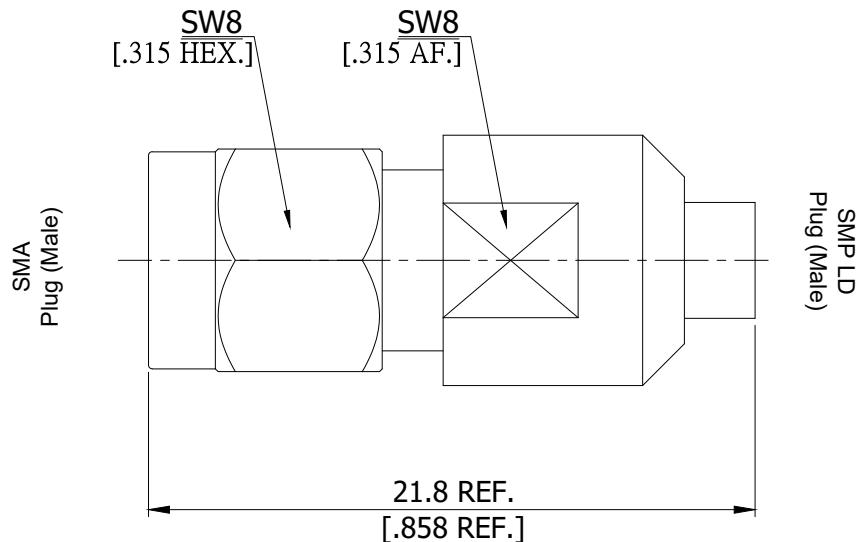

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

SMA Side
IEC 60169-15; MIL-STD-348A/310SMP Side
MIL-STD-348B/326-3 (Limited Detent)

Electrical Data

Impedance

50 Ω

Frequency

DC to 26.5 GHz

VSWR (Return Loss)

≤ 1.29 (≥ 18 dB)

Insertion Loss

≤ 0.1 x √f (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3.0 mΩ, SMA Side

N/A, SMP Side

Outer Contact Resistance

≤ 2.0 mΩ, SMA Side

N/A, SMP Side

Test Voltage (at sea level)

500 V rms

Working Voltage (at sea level)

250 V rms

Material And Plating

Piece Parts (SMA)

Material

Plating

Centre contact

Brass

Gold plating, 3 pinch
(Non-magnetic nickel-phosphorus underplating, 80 pinch)

Body

Stainless Steel

Passivated

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Stainless Steel

Passivated

Piece Parts (SMP)

Material

Plating

Centre contact

Brass

Gold plating, 3 pinch
(Non-magnetic nickel-phosphorus underplating, 80 pinch)

Body

Stainless Steel

Passivated

Insulator

PTFE

SMA plug (male) / SMP plug (male) Limited Detent
Adapter DC-26.5GHz, VSWR 1.29

AD-A1P1LD5A / 1XX-1X

Mechanical Data

Coupling mechanisms	SMA Side	SMP Side
Mating Cycles	Screw-lock	Snap-on
Coupling Nut Retention	≥ 500	if mated with Limited detent: ≥ 100
Center Contact Captivation: axial	N/A	N/A
Weight	≥ 28 N	≥ 7 N
Coupling Test Torque	N/A	N/A
Recommended Torque	1.7 Nm max.	N/A
Engagement force	0.9 Nm	N/A
Disengagement force	N/A	Limited detent: ≥ 45 N
		Limited detent: ≥ 9 N

Environmental Data

Temperature Range	-55°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100