


SMA jack (female) / SMA jack (female) Straight Adaptor
DC-18 GHz, VSWR ≤ 1.20

AD-A2A25C / 91-91

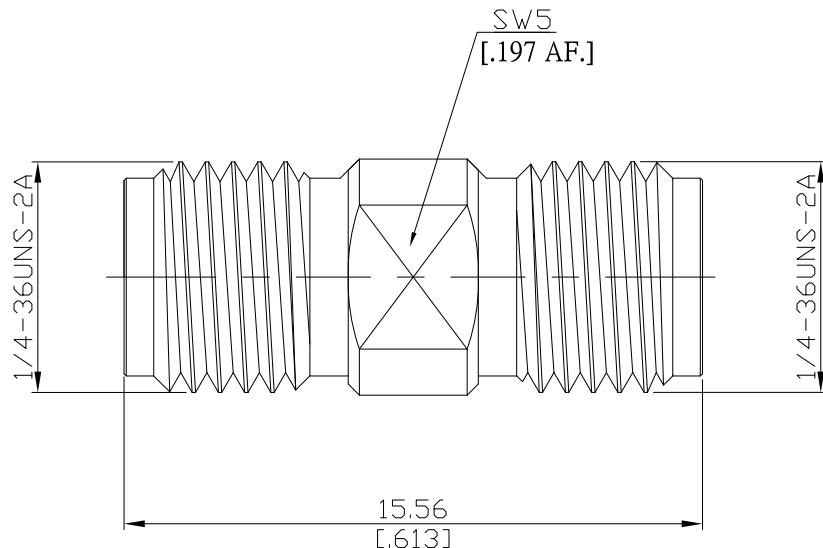

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 3 mΩ

Outer contact resistance

≤ 2 mΩ

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

Material And Plating**Piece Parts (SMA)****Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

Insulator

PTFE

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Piece Parts (SMA)**Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

Insulator

PTFE

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

SMA jack (female) / SMA jack (female) Straight Adaptor
DC-18 GHz, VSWR ≤ 1.20

AD-A2A25C / 91-91

Mechanical Data

| | |
|-----------------------------------|------------------|
| Coupling mechanisms | Screw-lock |
| Mating cycles | ≥ 500 |
| Center contact captivation: axial | ≥ 27 N |
| radial | ≥ 3 Ncm |
| Coupling test torque | ≤ 1.7 Nm |
| Recommended torque | 0.8 Nm to 1.1 Nm |

Environmental Data

| | |
|---------------------|--------------------------------------|
| Temperature Range | -65 °C to +155 °C |
| Thermal shock | MIL-STD-202, Method 107, Condition B |
| Corrosion | MIL-STD-202, Method 101, Condition B |
| Vibration | MIL-STD-202, Method 204, Condition D |
| Shock | MIL-STD-202, Method 213, Condition I |
| Moisture resistance | MIL-STD-202, Method 106 |
| RoHS | compliant |

Packing

Single or 100