


SMA jack (female) / SMA R/P jack (female) Straight Adaptor  
DC-18 GHz, VSWR  $\leq$  1.2

## AD-A2A75A / 91-91

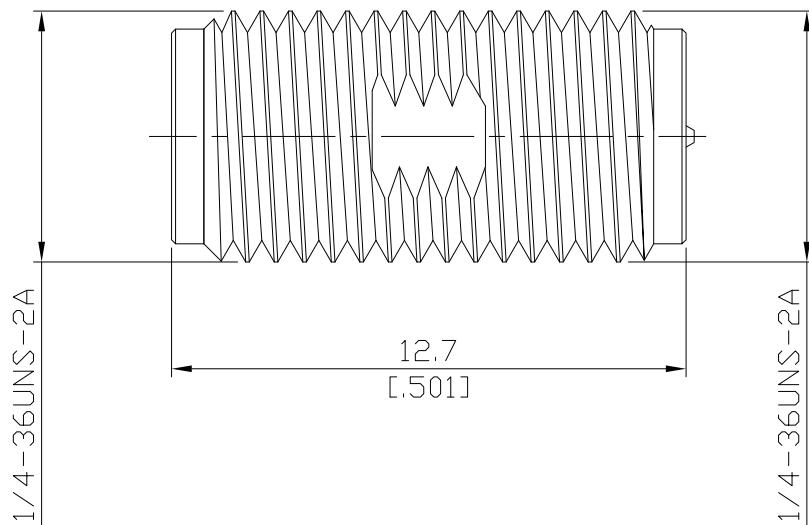

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance

50  $\Omega$ 

Frequency

DC to 18 GHz

VSWR (Return Loss)

 $\leq 1.20 (\geq 20.83 \text{ dB})$ 

Insertion Loss

 $\leq 0.05 \times \sqrt{f} (\text{GHz}) \text{ dB}$ 

Insulation resistance

 $\geq 5 \text{ G}\Omega$ 

Center contact resistance

 $\leq 3 \text{ m}\Omega$ 

Outer contact resistance

 $\leq 2 \text{ m}\Omega$ 

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling

 $\leq 200 \text{ W} @ 2 \text{ GHz}$ 

RF-leakage

 $\geq 100 \text{ dB up to 1 GHz}$ **Material And Plating****Piece Parts (SMA)****Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3  $\mu\text{inch}$ (Non-magnetic nickel-phosphorus underplating, 80  $\mu\text{inch}$ )

Body

Brass

Gold plating, 3  $\mu\text{inch}$ (Non-magnetic nickel-phosphorus underplating, 80  $\mu\text{inch}$ )

Insulator

PTFE

**Piece Parts (SMA)****Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3  $\mu\text{inch}$ (Non-magnetic nickel-phosphorus underplating, 80  $\mu\text{inch}$ )

Body

Brass

Gold plating, 3  $\mu\text{inch}$ (Non-magnetic nickel-phosphorus underplating, 80  $\mu\text{inch}$ )

Insulator

PTFE

SMA jack (female) / SMA R/P jack (female) Straight Adaptor  
DC-18 GHz, VSWR  $\leq$  1.22

AD-A2A75A / 91-91

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	$\geq 500$
Center contact captivation: axial	$\geq 27 \text{ N}$
radial	$\geq 3 \text{ Ncm}$
Coupling test torque	$\leq 1.7 \text{ Nm}$
Recommended torque	0.8 Nm to 1.1 Nm

## Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100