


SMA jack (female) / BNC jack (female) Adapter
 DC-6 GHz VSWR1.2

AD-A2B25A / 9X-9X

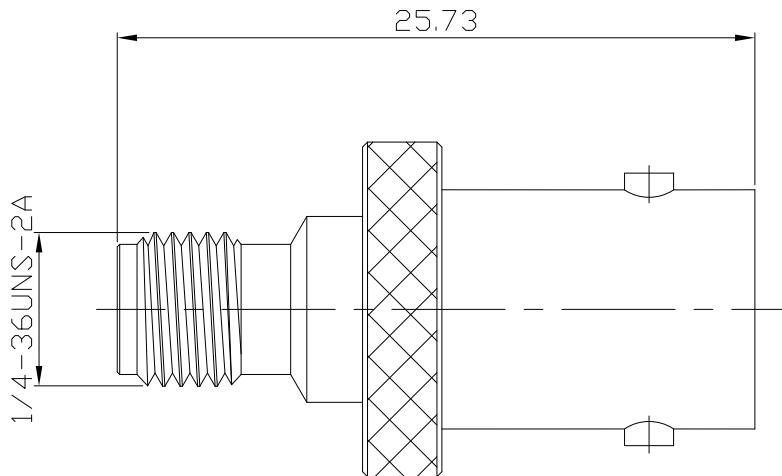

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

 SMA side according to
 BNC side according to

 IEC 60169-15;CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310
 MIEC 61169-8;CECC 22120;MIL-PRF-39012;BNC Interface MIL-STD-348/301;BS 9210 N 004

Electrical Data

Impedance	50 Ω	
Frequency	DC to 6 GHz	
VSWR (Return Loss)	DC-4 GHz: ≤ 1.15 (≥ 23.13 dB)	4.6 GHz: ≤ 1.2 (≥ 20.83 dB)
Insertion Loss	$\leq 0.04 \times \sqrt{f}$ (GHz) dB	
Insulation Resistance	≥ 5 GΩ	
Center contact resistance	≤ 3 mΩ, SMA side	≤ 1.5 mΩ, BNC side
Outer contact resistance	≤ 2 mΩ, SMA side	≤ 1.0 mΩ, BNC side
Test Voltage (at sea level)	1000 V rms	
Working Voltage (at sea level)	400 V rms	
RF Leakage	≤ 80 W @ 2 GHz	

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (BNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	



SMA jack (female) / BNC jack (female) Adapter
DC-6 GHz VSWR1.2

AD-A2B25A / 9X-9X

Mechanical Data

Coupling Mechanisms	SMA Side	BNC Side
Mating Cycles	Screw-lock	Bayonet-lock
Center Contact Captivation	min. 500	min. 500
Coupling test torque	≥ 27 N	≥ 27 N
Coupling test torque	max. 1.7 Nm	N/A
Coupling test torque	0.8 Nm to 1.1 Nm	N/A

Environmental Data

Temperature Range	-65 °C to +165 °C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100