


SMA Jack (Female) to MCX Jack (Female) Bulkhead Adapter
IP68 Mated DC-6GHz VSWR 1.20

AD-A2M25A-BH / 94-94

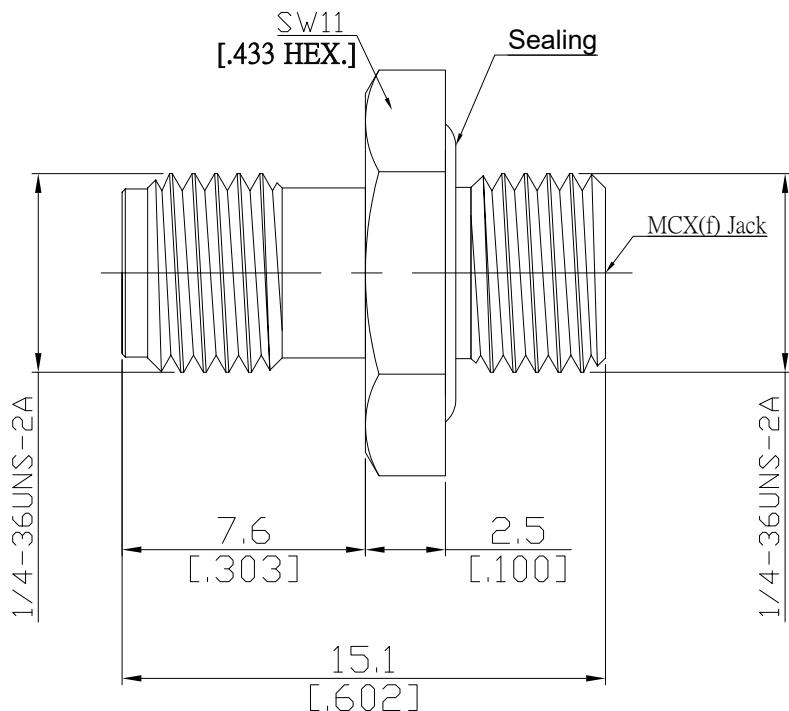

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMA according to

IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

MCX side according to

IEC 60169-36

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.8 dB)

Insertion Loss

$\leq 0.05 \times \sqrt{f}$ (GHz) dB

Insulation resistance

≥ 1 GΩ

Center contact resistance

≤ 5.0 mΩ, MCX side;

≤ 3 mΩ, SMA side

Outer contact resistance

≤ 2.5 mΩ, MCX side;

≤ 2 mΩ, SMA side

Test voltage

750 V rms

Working voltage

335 V rms

Contact Current

1.5A DC max.

Material And Plating

Piece Parts (SMA)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μ inch
(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Piece Parts (MCX)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μ inch
(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Gasket

Silicone rubber

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:

JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

**SMA Jack (Female) to MCX Jack (Female) Bulkhead Adapter
IP68 Mated DC-6GHz VSWR 1.20****AD-A2M25A-BH / 94-94****Mechanical Data**

	SMA Side	MCX Side
Coupling mechanisms	Screw-lock	Snap-lock
Center contact captivation: axial	≥ 27 N	≥ 27 N
Engagement force	≤ 25 N	N/A
Disengagement force	8 N min. to 20 N max.	N/A
Coupling test torque	N/A	max. 1.7 Nm
Recommended torque	N/A	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	CECC 22 220, Chapter 4.6.7
Vibration	CECC 22 220, Chapter 4.6.3
Corrosion	CECC 22 220, Chapter 4.6.10
Moisture resistance	CECC 22 220, Chapter 4.6.6
RoHS	compliant

Packing

Single or 100

Related Document

Mounting Dimension MD7