ROSNOL
RF/Microwave Interconnect

Technical Data Sheet

SMA jack (female)/Precision N jack(female)
4 Hole Panel Flange Adaptor, DC-18 GHz, VSWR ≤ 1.2

AD-A2PCN25A-PF / 9X-HX

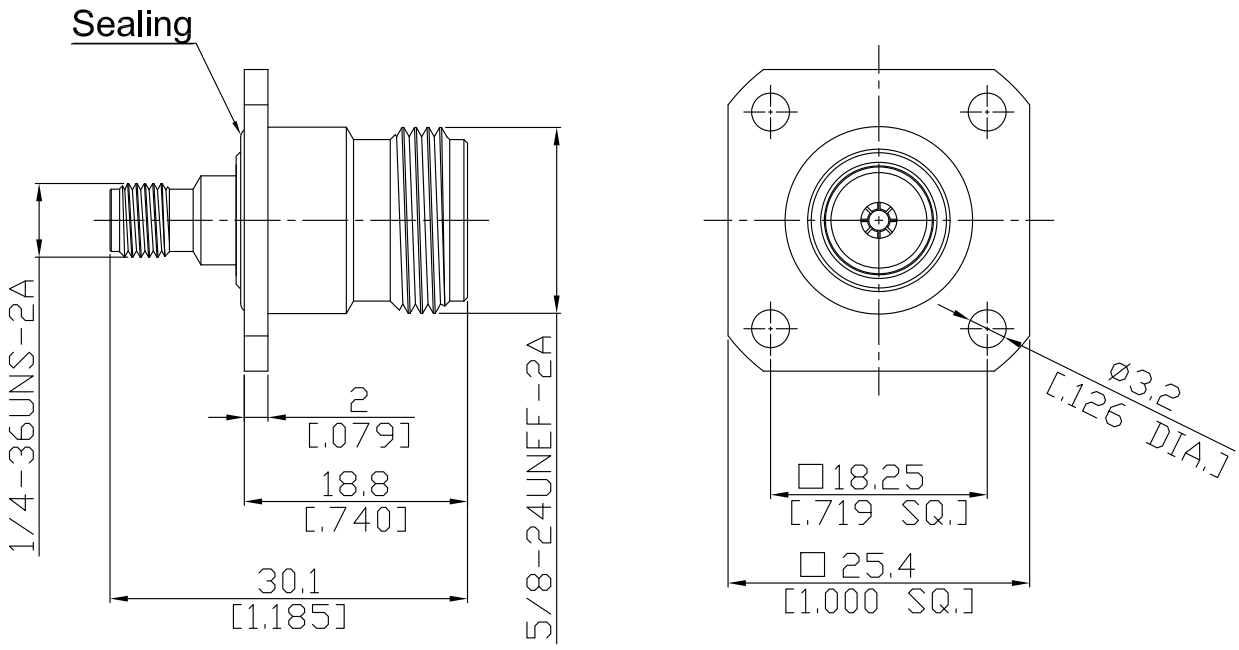

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

SMA according to	IEC 60169-15; MIL-STD-348B/310
Precision N according to	IEC 61169-16; MIL-STD-348B/402

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	≤ 1.2 (≥ 20.83 dB)
Insertion loss	≤ 0.04 x √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Test voltage (at sea level)	1000 V rms
Working voltage (at sea level)	480 V rms
RF-leakage	≥ 90 dB up to 1 GHz

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (Precision N)	**Material**	**Plating**
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

SMA jack (female)/Precision N jack(female)
4 Hole Panel Flange Adaptor, DC-18 GHz, VSWR ≤ 1.2

AD-A2PCN25A-PF / 9X-HX

Mechanical Data

	SMA side	Precision N side
Coupling mechanisms	Screw-lock	Screw-lock
Mating cycles	min. 500	min. 500
Center contact captivation: axial	≥ 28 N	≥ 28 N
Coupling test torque	max. 1.7 Nm	max. 1.7 Nm
Recommended torque	0.80 Nm to 1.10 Nm	0.70 Nm to 1.10 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Singleor 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified