



SMA Jack (Female) to Precision N Jack (Female)
Bulkhead SMA Side Mount with Sealing Adapter DC-18 GHz VSWR1.15

AD-A2PCN25C-BHS / 9X-9X

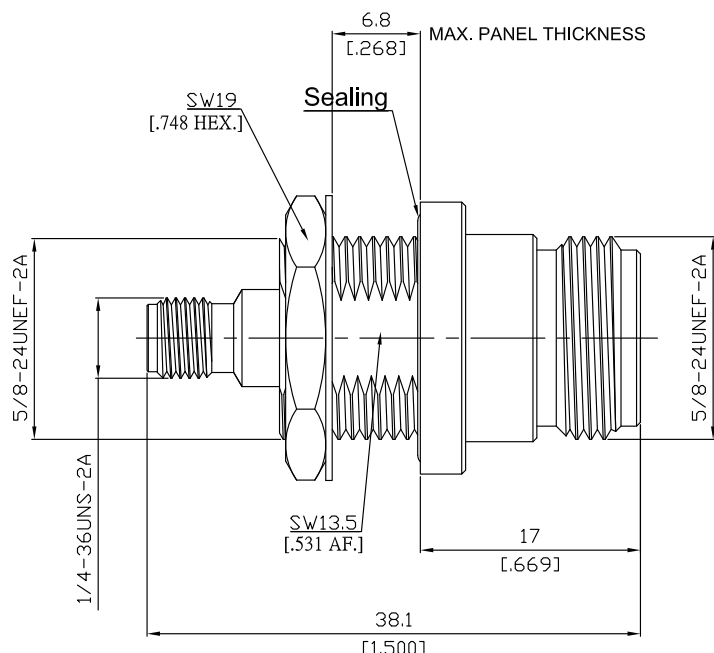

MOUNTING DIMENSIONS



	mm		inch	
	MAX.	MIN.	MAX.	MIN.
A	16.1	16	.634	.630
B	13.7	13.6	.539	.535

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMA according to

IEC 60169-15; MIL-STD-348B/310

N according to

IEC 60169-16; MIL-STD-348B/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≥ 1.15 (≥ 23 dB)

Insertion loss

≤ 0.1 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Test voltage (at sea level)

1000 V rms

Working voltage (at sea level)

480 V rms

RF-leakage

≥ 90 dB up to 1 GHz

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (Precision N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Stainless Steel	Passivated
Washer	Brass	Copper-Tin-Zinc Alloy

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:
Date:
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page
1/2

SMA Jack (Female) to Precision N Jack (Female)
Bulkhead SMA Side Mount with Sealing Adapter DC-18 GHz VSWR1.15

AD-A2PCN25C-BHS / 9X-9X

Mechanical Data

	SMA side	Precision N side
Coupling mechanisms	Screw-lock	Screw-lock
Mating cycles	≥ 500	≥ 500
Center contact captivation	≥ 28 N	≥ 28 N
Coupling test torque	1.70 Nm	1.70 Nm
Recommended torque	0.80 Nm to 1.10 Nm	0.70 Nm to 1.10 Nm

Environmental Data

Temperature Range	-65°C to +125°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Single or 100