


SMA jack (female) / Precision TNC jack (female) Bulkhead Adaptor
DC-18GHz VSWR 1.25

AD-A2PCT25C-BH / 9X-9X

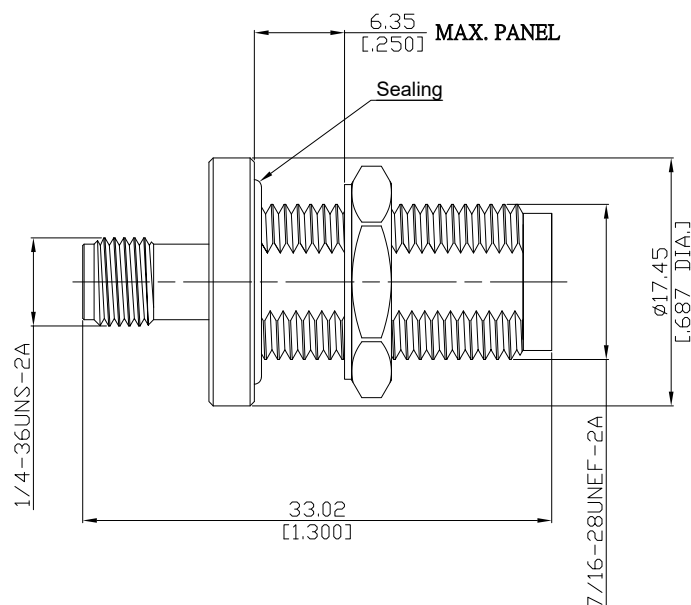

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMA according to

IEC 60169-15; MIL-STD-348B/310

TNC according to

IEC 60169-26; MIL-STD-348B/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19 dB)

Insertion Loss

$\leq 0.1 \times \sqrt{F}$ (GHz) dB

Insulation resistance

≥ 5 G Ω

Center contact resistance

≤ 3.0 m Ω , SMA side

≤ 1.5 m Ω , Precision TNC side

Outer contact resistance

≤ 2.0 m Ω , SMA side

≤ 1.0 m Ω , Precision TNC side

Test voltage

1000 V rms

Working voltage

480 V rms

RF-leakage

≥ 90 dB up to 1 GHz

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (Precision TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Stainless Steel	Passivated
Washer	Stainless Steel	Passivated

SMA jack (female) / Precision TNC jack (female) Bulkhead Adaptor
DC-18GHz VSWR 1.25

AD-A2PCT25C-BH / 9X-9X

Mechanical Data

	SMA side	Precision TNC side
Coupling mechanisms	Screw-lock	Screw-lock
Mating cycles	≥ 500	≥ 500
Center contact captivation	≥ 27 N	≥ 27 N
Coupling test torque	1.70 Nm	1.70 Nm
Recommended torque	0.80 Nm to 1.10 Nm	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100

Related Document

Mounting Dimension MD7