




SMA jack (female) / TNC jack (female)
Adapter DC-11 GHz VSWR1.20

AD-A2T25A / 94-94

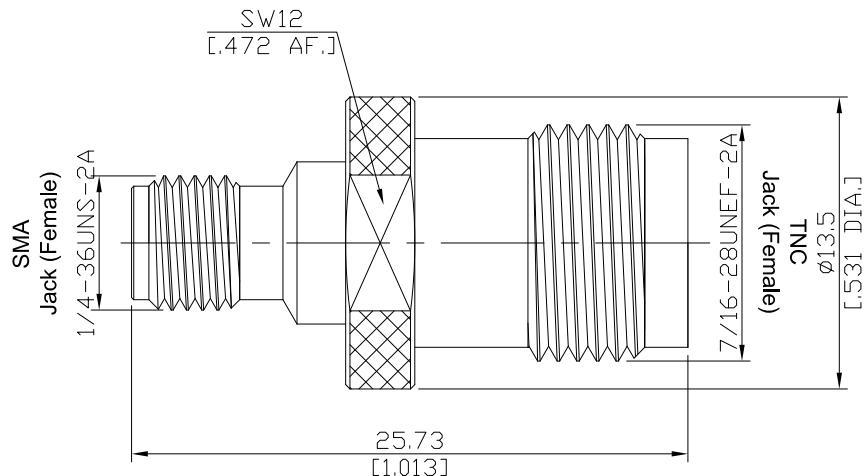

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMA according to

IEC 60169-15; CECC 22110; MIL-PRF-39012; MIL-STD-348B/310; EN 122110

TNC according to

IEC 61169-17; CECC 22200; MIL-PRF-39012; MIL-STD-348B/313; DIN EN 122200

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3.0 mΩ, SMA Side

≤ 1.5 mΩ, TNC side

Outer Contact Resistance

≤ 2.0 mΩ, SMA Side

≤ 1 mΩ, TNC side

Test Voltage

1000 V rms

Working Voltage

480 V rms

Power handling

≤ 80 W @ 2 GHz

Material And Plating

Piece Parts (SMA)

Material

Plating

Centre contact

Beryllium Copper

Gold plating

(Non-magnetic nickel-phosphorus underplating)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Piece Parts (TNC)

Material

Plating

Centre contact

Beryllium Copper

Gold plating

(Non-magnetic nickel-phosphorus underplating)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE



SMA jack (female) / TNC jack (female)
Adapter DC-11 GHz VSWR 1.20

AD-A2T25A / 94-94

Mechanical Data

Coupling mechanisms	SMA Side	TNC Side
Mating Cycles	Screw-lock	Screw-lock
Center contact captivation: axial	min. 500	min. 500
Coupling test torque	≥ 27 N	≥ 27 N
Recommended torque	max. 1.7 Nm	max. 1.7 Nm
	0.8 Nm to 1.1 Nm	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. G
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100