


Reverse Polarity SMA jack (female) / Reverse Polarity SMA jack (female)
Bulkhead adaptor DC-18 GHz, VSWR \leq 1.15

AD-A7A75B-BH / 11-11

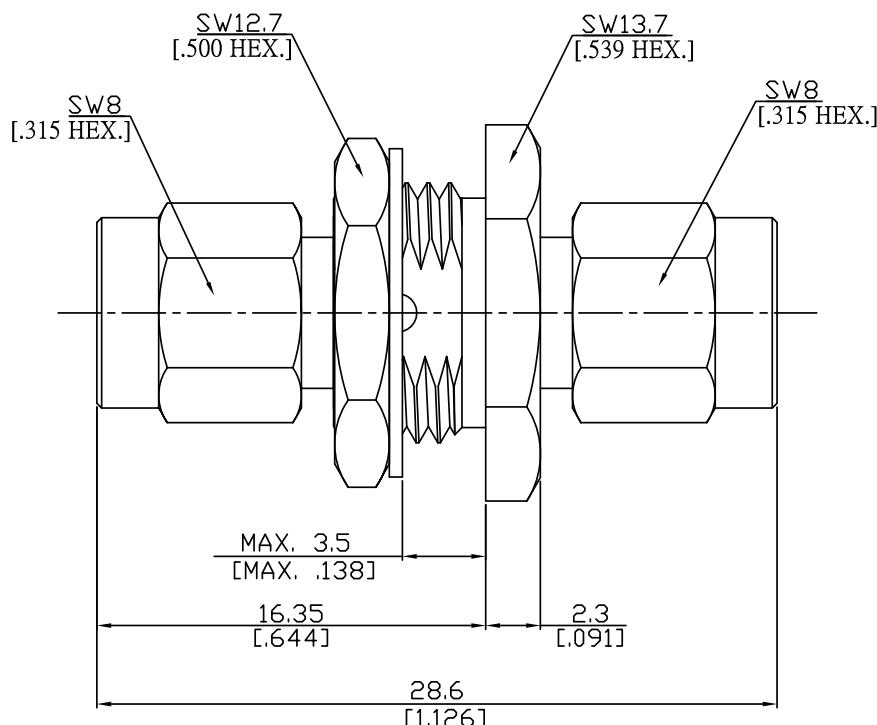

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	\leq 1.15 ($>$ 23.13 dB)
Insertion loss	$\leq 0.04 \times \sqrt{f}$ (GHz) dB
Insulation resistance	≥ 5 G Ω
Center contact resistance	≤ 3 m Ω , reverse SMA side;
Outer contact resistance	≤ 2 m Ω , reverse SMA side;
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	\leq 200 W @ 2 GHz
RF-leakage	\geq 100 dB up to 1 GHz

Reverse Polarity SMA jack (female) / Reverse Polarity SMA jack (female)
Bulkhead adaptor DC-18 GHz, VSWR \leq 1.15

AD-A7A75B-BH / 11-11

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Fastening nut	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Washer	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Gasket	Silicon Rubber	
Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

Mechanical Data

Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100