


BNC plug (male) / SMC jack (female)  
Straight adaptor DC- 4GHz VSWR1.35

**AD-B1MC25A / 133-11**

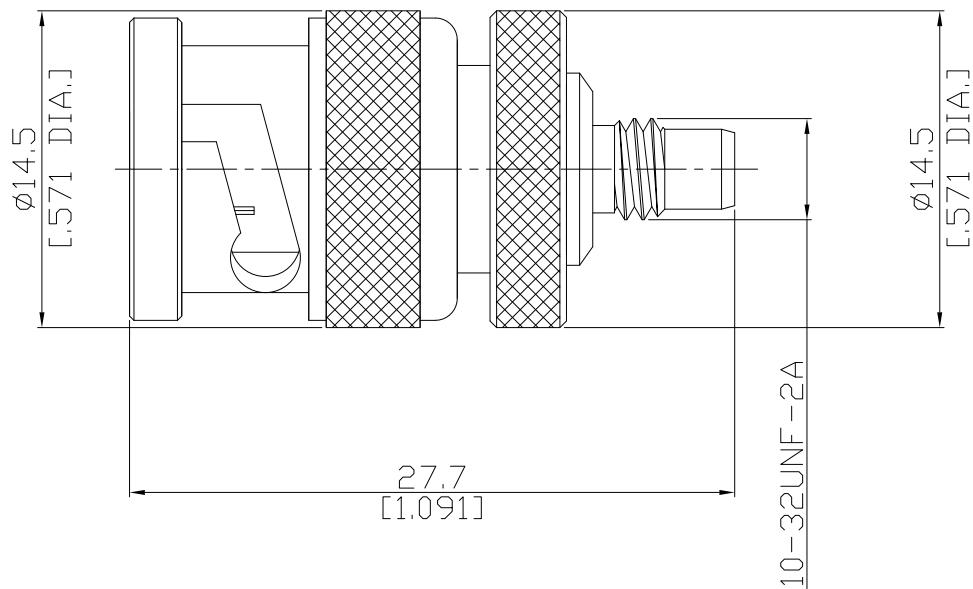

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

BNC according to  
SMC according to

IEC 60169-8; MIL-STD-348B/301  
IEC 60169-9; MIL-STD-348B/312

#### Electrical Data

Impedance	50 Ω
Frequency	DC to 4 GHz
VSWR (Return Loss)	≤ 1.35 (≥ 16.54 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Center contact resistance	≤ 1.5 mΩ, BNC side;
Outer contact resistance	≤ 1 mΩ, BNC side;
Test voltage	750 V rms, 50 Hz, at sea level
Working voltage	≤ 250 V rms, 50 Hz, at sea level
RF-leakage	≥ 90 dB up to 1 GHz

#### Material And Plating

Piece Parts (BNC)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Coupling nut	Brass	Nickel
Piece Parts (SMC)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

BNC plug (male) / SMC jack (female)  
Straight adaptor DC- 4GHz VSWR1.35

## AD-B1MC25A / 133-11

## Mechanical Data

Coupling mechanisms	BNC side	SMC side
Mating cycles	Bayonet-lock	Screw-lock
Center contact captivation: axial	min. 500	min. 500
Coupling nut retention	≥ 27 N	≥ 10 N
Coupling test torque	N/A	≥ 150 N
Recommended torque	N/A	max. 0.71 Nm
		0.25 Nm to 0.35 Nm

## Environmental Data

Temperature Range	-65°C to +165°C
RoHS	compliant

## Packing

Single or 100