


Straight adaptor plug/jack, BNC plug (male) to N jack (female)
DC- 4GHz VSWR1.15

AD-B1N25A / 144-H4

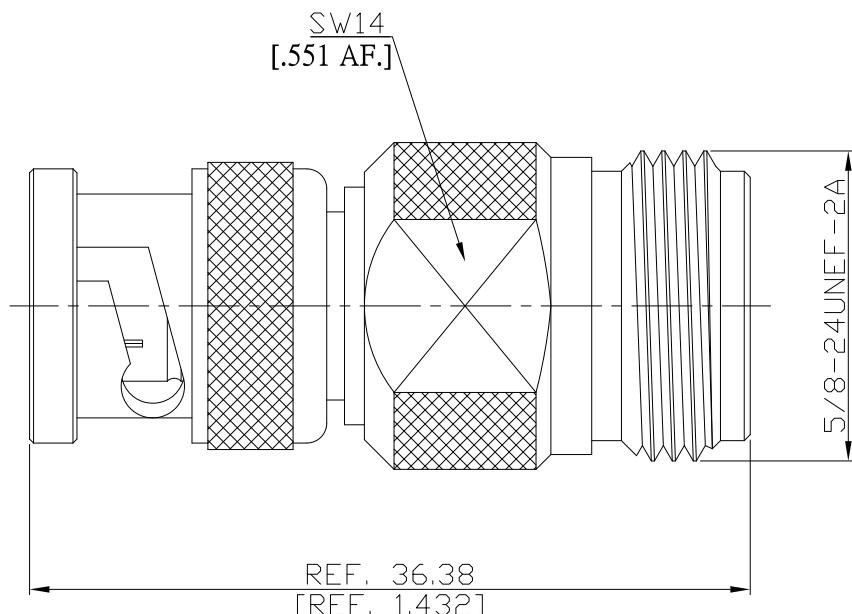

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

BNC side according to

IEC 61169-8;CECC 22120;MIL-PRF-39012;BNC Interface MIL-STD-348/301;BS 9210 N 004

N side according to

IEC 60169-16;MIL-STD-348/304;CECC 22 210

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Insertion loss

≤ 0.05 × √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1.5 mΩ, BNC side;

≤ 1 mΩ N side

Outer contact resistance

≤ 1 mΩ, BNC side;

≤ 0.25 mΩ, N side

Test voltage

1500 V rms

Working voltage

400 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 80 W @ 2 GHz

Material And Plating

Piece Parts (BNC)

Material

Plating

Centre contact

Brass

Gold plating

(Non-magnetic nickel-phosphorus underplating)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Copper-Tin-Zinc Alloy

Piece Parts (N)

Material

Plating

Centre contact

Phosphor Bronze

Gold plating

(Non-magnetic nickel-phosphorus underplating)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Straight adaptor plug/jack, BNC plug (male) to N jack (female)
DC- 4GHz VSWR1.15

AD-B1N25A / 144-H4

Mechanical Data

Coupling mechanisms	BNC side	N side
Mating cycles	Bayonet-lock	Screw-lock
Center contact captivation	min. 500	min. 500
Coupling test torque	≥ 28 N	≥ 28 N
Recommended torque	N/A	max. 1.7 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100