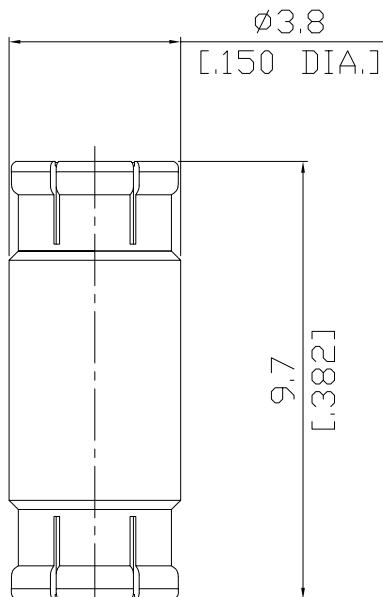


Adaptor plug/plug
 MMBX plug (male) / MMBX plug (male)

AD-BX1BX15A/9H-9H


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

N/A

Electrical Data

Impedance

50 Ω

Frequency

DC to 12.4 GHz

VSWR (Return Loss)

DC - 6 GHz: ≤ 1.15 (≥ 23.13 dB)

Insertion Loss

≤ 0.18 x √F (GHz) dB

Mechanical Data

Coupling mechanisms

Slide-on

Weight

N/A

Environmental Data

Temperature range

-55°C to +155°C

RoHS

compliant

Material And Plating
Piece Parts (MMBX)
Material
Plating

Centre contact

Beryllium Copper

Gold plating(Nickel underplated)

Body

Phosphor Bronze

Gold plating(Nickel underplated)

Insulator

PTFE

Piece Parts (MMBX)
Material
Plating

Centre contact

Beryllium Copper

Gold plating(Nickel underplated)

Body

Phosphor Bronze

Gold plating(Nickel underplated)

Insulator

PTFE

Packing

Single or 100