


HN jack (female) / HN jack (female) Adaptors Straight DC-4 GHz VSWR1.33

AD-HN2HN25A / 03-03

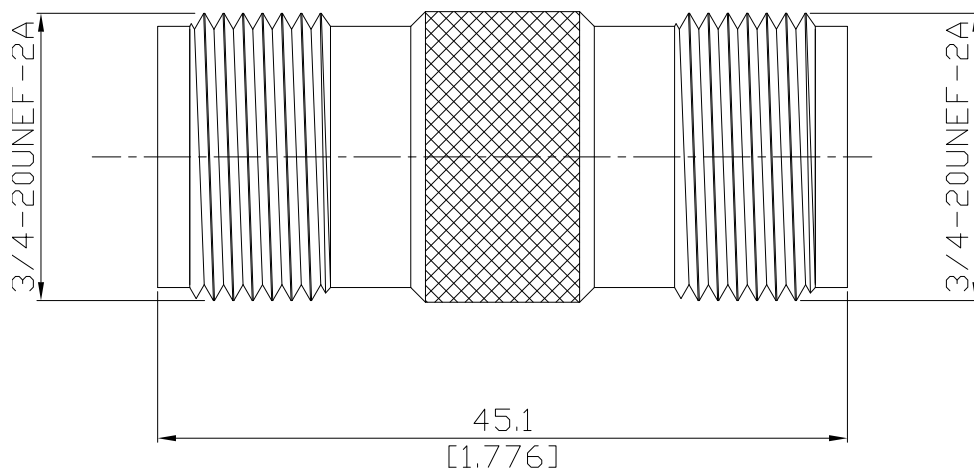

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-C-3643; MIL-STD-348B/317

Electrical Data

Impedance	50 Ω
Frequency	DC to 4 GHz
VSWR (Return Loss)	≤ 1.33 (≥ 17 dB)
Insertion Loss	$\leq 0.1 \times \sqrt{F}$ (GHz) dB
Insulation resistance	≥ 10 G Ω
Center contact resistance	≥ 8 m Ω
Outer contact resistance	≥ 2 m Ω
Test voltage	3500 V rms
Working voltage	2500 V rms
RF leakage	≥ 128 dB @ DC to 1 GHz

Material And Plating

Piece Parts (HN)	Material	Plating
Centre contact	Brass	Silver
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (HN)	Material	Plating
Centre contact	Brass	Silver
Body	Brass	Nickel
Insulator	PTFE	

HN jack (female) / HN jack (female) Adaptors Straight DC-4 GHz VSWR1.33

AD-HN2HN25A / 03-03

Mechanical Data

Coupling Mechanisms	Screw-lock
Mating Cycles	≥ 300
Coupling test torque	≤ 1.7 Nm
Coupling torque recommended	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion resistance	MIL-STD-202, Method 101, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Vibration	MIL-STD-202, Method 204, Condition B
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100