


2.92mm Plug (Male) / 3.5mm Jack (Female) Adapter  
DC- 34.5 GHz VSWR 1.2

## AD-K1PC25A / 9XX-9X

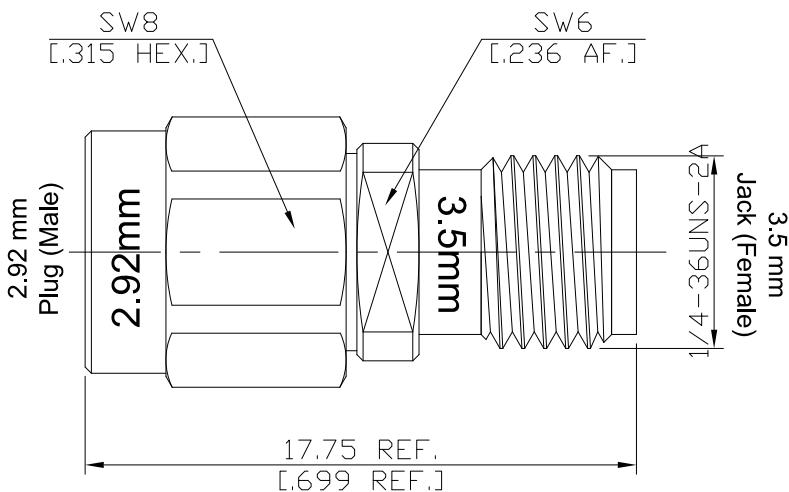

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

2.92mm According to	IEC 61169-35; IEEE Std 287
Mechanically compatible with	3.5mm, SMA
3.5mm According to	IEC 60169-23; IEEE Std 287
Mechanically compatible with	2.92mm, SMA

### Electrical Data

Impedance	50 Ω
Frequency	DC to 34.5 GHz
VSWR (Return Loss)	≤ 1.2 (≥ 20.83 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Center Contact Resistance	≤ 3 mΩ
Outer Contact Resistance	≤ 2 mΩ
Insulation resistance	≥ 5 GΩ
Test Voltage (at sea level)	750 V rms
Working voltage (at sea level)	250 V rms
RF-leakage	≥ 100 dB up to 1 GHz
Power Handling	22W

### Material And Plating

Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Coupling nut	Stainless Steel	Passivated
Gasket	Silicone	
Piece Parts (3.5mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-  
Date: DEC/25/2024

Rosnol RF/Microwave Technology Co., Ltd.  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)  
Phone: +886-3-463-5095 / Fax: +886-3-463-5952  
N-CAGE Code: SFKK0 / ISO9001 Certified

Page  
1/2



2.92mm Plug (Male) / 3.5mm Jack (Female) Adapter  
DC- 34.5 GHz VSWR 1.2

**AD-K1PC25A / 9XX-9X**

**Mechanical Data**

Coupling mechanisms	2.92mm side	3.5mm side
Mating Cycles	Screw-lock	Screw-lock
Center contact captivation	≥ 500	≥ 500
Coupling test torque	≥ 20 N	≥ 20 N
Recommended Torque	1.70 Nm	1.70 Nm
	0.80 Nm to 1.10 Nm	0.80 Nm to 1.10 Nm

**Environmental Data**

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100