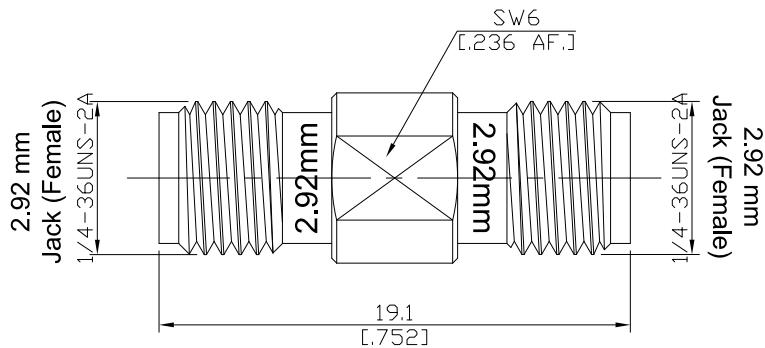


2.92mm Jack (Female) / 2.92mm Jack (Female)  
 Adaptors Straight DC-40GHz VSWR1.15

**AD-K2K25A / 9X-9X**


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 61169-35; IEEE Std 287

Mechanically compatible with

3.50mm, SMA

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 40 GHz

VSWR (Return Loss)

 ≤ 1.15 ( $\geq$  23.13 dB)

Insertion Loss

 ≤ 0.03  $\times$   $\sqrt{F}$  (GHz) dB

Insulation Resistance

 $\geq$  5 GΩ

Test Voltage (at sea level)

750 V rms

Working Voltage (at sea level)

250 V rms

RF Leakage

 $\geq$  100 dB up to 1 GHz

**Material And Plating**

Piece Parts (2.92mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Piece Parts (2.92mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	

2.92mm Jack (Female) / 2.92mm Jack (Female)  
Adaptors Straight DC-40GHz VSWR1.15

**AD-K2K25A / 9X-9X**

**Mechanical Data**

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation	≥ 20 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

**Environmental Data**

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

**Packing**

Single or 100