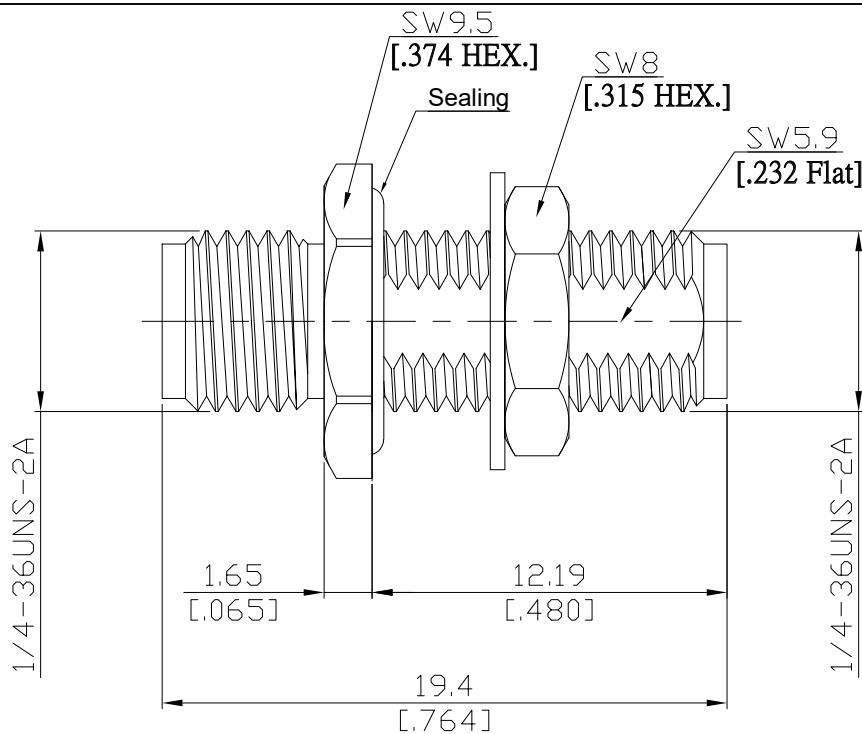


2.92mm Jack (Female) to 2.92mm Jack (Female) Bulkhead Adaptor  
 DC-40 GHz, VSWR  $\leq$  1.15

**AD-K2K25B-BH / 9X-9X**


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

IEC 61169-35, IEEE Std 287-2007

**Electrical Data**

Impedance

 50  $\Omega$ 

Frequency

DC to 40 GHz

VSWR (Return Loss)

 $\leq 1.15 (\geq 23.13 \text{ dB})$ 

Insertion Loss

 $\leq 0.04 \times \sqrt{f} \text{ (GHz) dB}$ 

Insulation resistance

 $\geq 5 \text{ G}\Omega$ 

Test voltage (at sea level)

750 V rms

Working voltage (at sea level)

250 V rms

RF-leakage

 $\geq 100 \text{ dB up to 1 GHz}$ 
**Material And Plating**

Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 $\mu$ inch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Stainless Steel	Passivated
Insulator	PEI	
Fastening nut	Stainless Steel	Passivated
Washer	Stainless Steel	Passivated
Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 $\mu$ inch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Stainless Steel	Passivated
Insulator	PEI	

**2.92mm Jack (Female) to 2.92mm Jack (Female) Bulkhead Adaptor  
DC-40 GHz, VSWR ≤ 1.15****AD-K2K25B-BH / 9X-9X****Mechanical Data**

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 20 N
Coupling test torque	1.7 Nm
Recommended torque	0.80 Nm to 1.10 Nm

**Environmental Data**

Temperature Range	-55 °C to +155 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

**Packing**

Single or 100