



2.92mm Jack (Female) to 2.92mm Jack (Female) Bulkhead Adaptor
DC-40 GHz, VSWR ≤ 1.15

AD-K2K25C-BH / 9X-9X

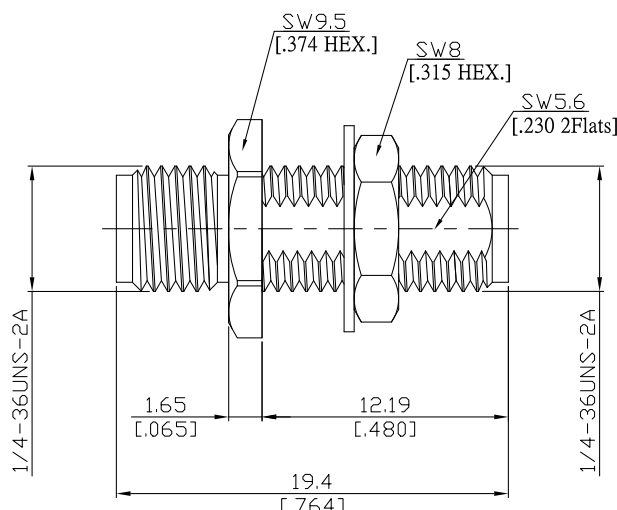

Mounting Dimension



	mm		inch	
	Max.	Min.	Max.	Min.
A	6.5	6.4	.256	.252
B	5.8	5.7	.228	.224

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 60169-15; CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.04 × √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Test voltage (at sea level)	750 V rms
Working voltage (at sea level)	250 V rms
RF-leakage	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 100 μinch)
Body	Stainless Steel	Passivated
Insulator	PEI	
Fastening nut	Stainless Steel	Passivated
Washer	Stainless Steel	Passivated
Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 100 μinch)
Body	Stainless Steel	Passivated
Insulator	PEI	

2.92mm Jack (Female) to 2.92mm Jack (Female) Bulkhead Adaptor
DC-40 GHz, VSWR ≤ 1.15

AD-K2K25C-BH / 9X-9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 20 N
Coupling test torque	1.7 Nm
Recommended torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100