


MCX plug (male) to MCX plug (male) Bulkhead Mount Adapter
DC-4GHz, VSWR≤ 1.35

AD-M1M15A-BH / 1H-1H

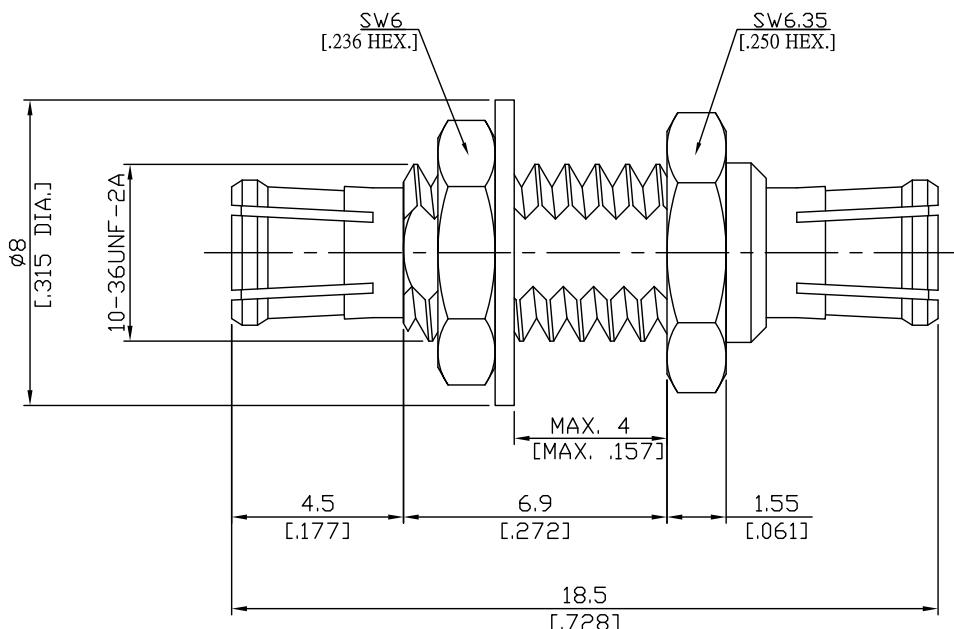

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

TNC According to
MCX According to

IEC 60169-17; MIL-STD-348B/313
IEC 61169-36

Electrical Data

Impedance
Frequency
VSWR (Return Loss)

50 Ω
DC to 4 GHz
≤ 1.35 (≥ 16.54 dB)

Material And Plating

Piece Parts (MCX)	Material	Plating
Centre contact	Brass	Gold plating, 5 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Phosphor Bronze	Gold plating, 5 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Fastening nut	Brass	Gold plating, 5 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Washer	Brass	Gold plating, 5 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Piece Parts (MCX)	Material	Plating
Centre contact	Brass	Gold plating, 5 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Phosphor Bronze	Gold plating, 5 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

**MCX plug (male) to MCX plug (male) Bulkhead Mount Adapter
DC-4GHz, VSWR≤ 1.35****AD-M1M15A-BH / 1H-1H****Mechanical Data**

Coupling mechanisms Snap-lock

Environmental Data

Temperature Range -55°C to +155°C

RoHS compliant

Packing

Single or 100