


N Plug (Male) / BNC Plug (Male) Straight Adapter
DC-4 GHz VSWR 1.20

AD-N1B15A / 144-144

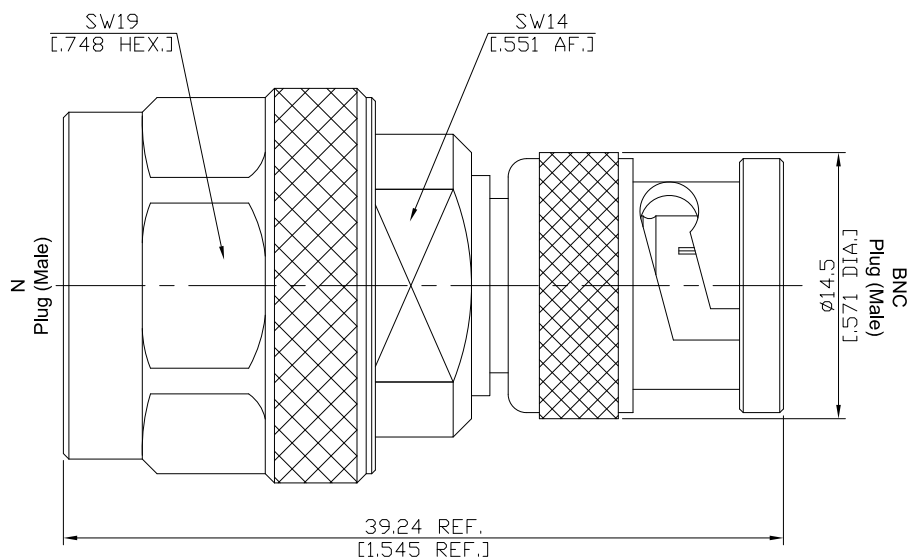

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N according to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

BNC according to

IEC 61169-8; CECC 22120; MIL-PRF-39012; MIL-STD-348B/301; BS 9210 N 004

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ, N side;

≤ 1.5 mΩ, BNC side

Outer contact resistance

≤ 0.25 mΩ, N side;

≤ 1 mΩ, BNC side

Test voltage

1500 V rms

Working voltage

400 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

80 W @ 2 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (BNC)	Material	Plating
Centre contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

N Plug (Male) / BNC Plug (Male) Straight Adapter
DC-4 GHz VSWR 1.20

AD-N1B15A / 144-144

Mechanical Data

	N side	BNC side
Coupling mechanisms	Screw-lock	Bayonet-lock
Mating cycles	min. 500	min. 500
Coupling nut retention	≥ 450 N	N/A
Center contact captivation: axial	≥ 28 N	≥ 28 N
Coupling test torque	max. 1.7 Nm	N/A
Recommended torque	0.7 Nm to 1.1 Nm	N/A

Environmental Data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100