



N plug (male) / N jack (female) Bulkhead Adaptor
DC-12 GHz, VSWR ≤ 1.20

AD-N1N25A-BH / H44-H4

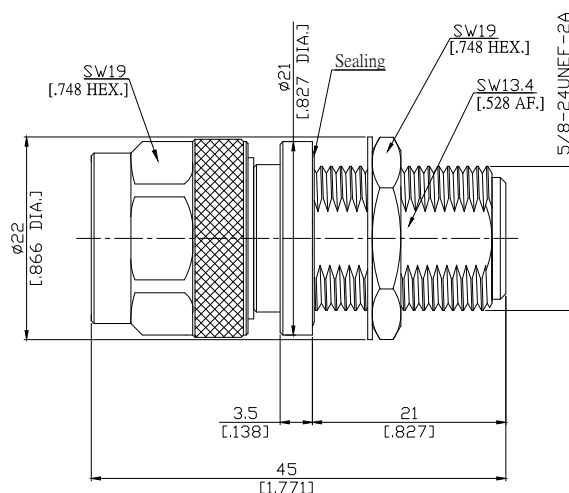

Mounting Dimensions



	mm		inch	
	Max.	Min.	Max.	Min.
A	15.75	15.7	.620	.618
B	13.5	13.45	.531	.530

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 61169-8; MIL-STD-348B/301

Electrical Data

Impedance

50 Ω

Frequency

DC to 12 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.1 × √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ

Outer contact resistance

≤ 0.25 mΩ

Working voltage

500 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

1000 W @ 1 GHz

700 W @ 2 GHz

RF-leakage

≥ 128 dB @ DC to 1 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Brass	Copper-Tin-Zinc Alloy
Washer	Brass	Copper-Tin-Zinc Alloy
Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

N plug (male) / N jack (female) Bulkhead Adaptor
DC-12 GHz, VSWR ≤ 1.20

AD-N1N25A-BH / H44-H4

Mechanical Data

Coupling mechanisms	Screw-lock
Coupling nut retention	≥ 450 N
Mating cycles	min. 500
Center contact captivation: axial	≥ 28 N
Coupling test torque	max. 1.7 Nm
Recommended torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100