


N plug (male) / SC plug (male)
Straight Adaptor DC-11 GHz VSWR ≤ 1.25

AD-N1SC15A / 144-144

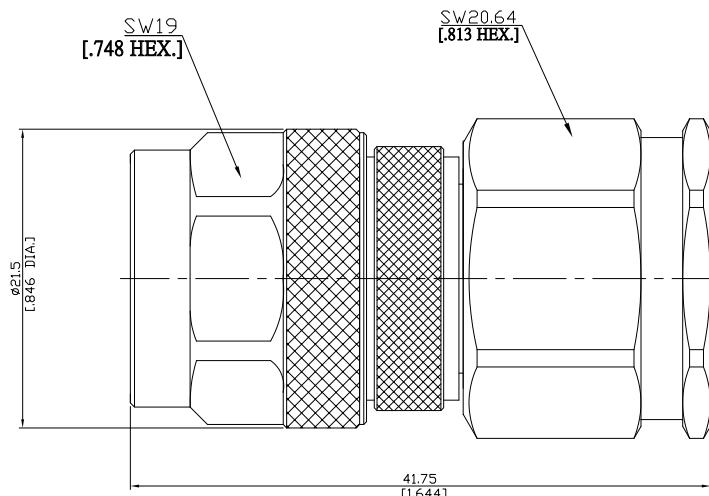

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N according to	IEC 60169-16 ; MIL-STD-348B/402
SC according to	MIL-STD-348B/309

Electrical Data

Impedance	50 Ω
Frequency	DC to 11 GHz
VSWR (Return Loss)	≤ 1.25 (≥ 19.1 dB)

Mechanical Data

Coupling mechanisms	N side	SC side
Mating cycles	Screw-lock	Quick-lock

Environmental Data

Temperature range	-65°C to +165°C
RoHS	compliant

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (SC)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-
Date:
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
 Phone: +886-3-463-5095 / Fax: +886-3-463-5952
 N-CAGE Code: SFKK0 / ISO9001 Certified

Page
1/1