




N Jack (Female) / N Jack (Female) Straight Adapter, DC - 12.4 GHz VSWR 1.3

AD-N2N25A / 94-94

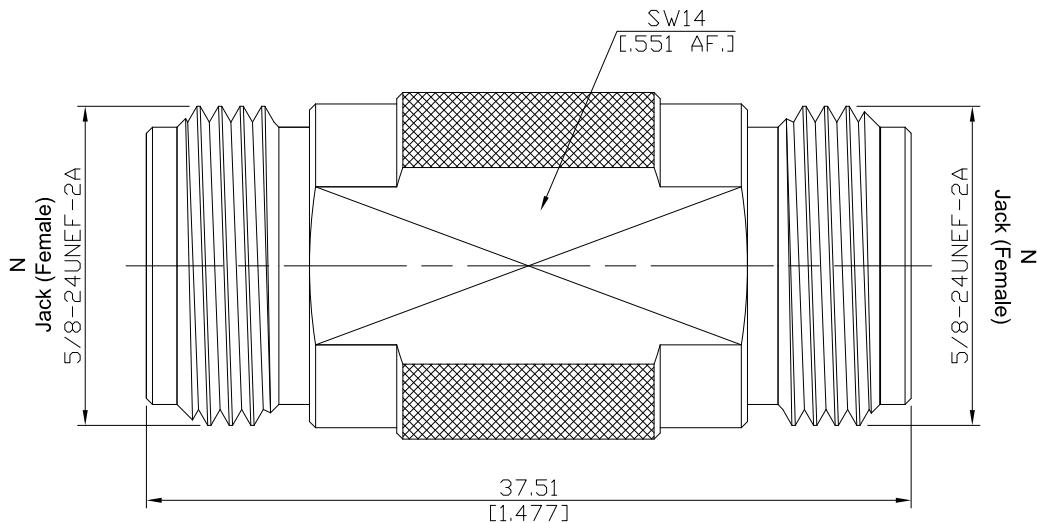

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance

50 Ω

Frequency

DC to 12.4 GHz

Insertion Loss

≤ 1.3 (≥ 17.69 dB)

Insertion loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ

Outer contact resistance

≤ 0.25 mΩ

Working voltage

500 V rms

Power handling

1000 W @ 1 GHz

700 W @ 2 GHz

RF leakage

≥ 128 dB @ DC to 1 GHz

Material And Plating

Piece Parts (N)

Material

Plating

Centre contact

Beryllium Copper

Gold plating
(Non-magnetic nickel-phosphorus underplating)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Piece Parts (N)

Material

Plating

Centre contact

Beryllium Copper

Gold plating
(Non-magnetic nickel-phosphorus underplating)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

N Jack (Female) / N Jack (Female) Straight Adapter, DC-12.4 GHz VSWR 1.3

AD-N2N25A / 94-94

Mechanical Data

Coupling Mechanisms	Screw-lock
Mating Cycles	min. 500
Center contact captivation: axial	≥ 28 N
Coupling test torque	max. 1.7 Nm
Recommended torque	1.0 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100