

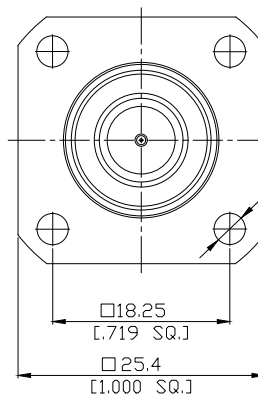


N Jack (Female) to N Jack (Female)
Panel 4 Hole Flange Mount Adapter DC-11GHz VSWR1.15

AD-N2N25B-PF / 9X-9X

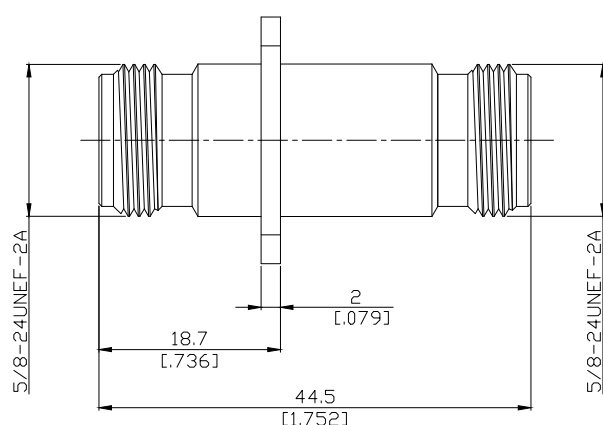

MOUNTING DIMENSIONS



	mm		inch	
	MAX.	MIN.	MAX.	MIN.
A	16.3	16.1	.642	.634
B	3.5	3.4	.138	.134
C	18.35	18.15	.722	.715

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16, MIL-STD-348B/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ

Outer contact resistance

≤ 0.25 mΩ

Power Handling

1000 W @ 1 GHz

700 W @ 2 GHz

RF Leakage

≥ 128 dB up to 1 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

N Jack (Female) to N Jack (Female)
Panel 4 Hole Flange Mount Adapter DC-11GHz VSWR1.15

AD-N2N25B-PF / 9X-9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100