
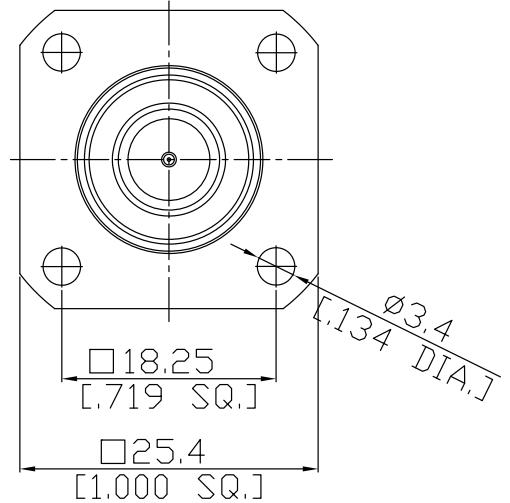


N Jack (Female) to N Jack (Female)  
Panel 4 Hole Flange Mount Adapter DC-11GHz VSWR1.15

## AD-N2N25B-PF / H3-H3

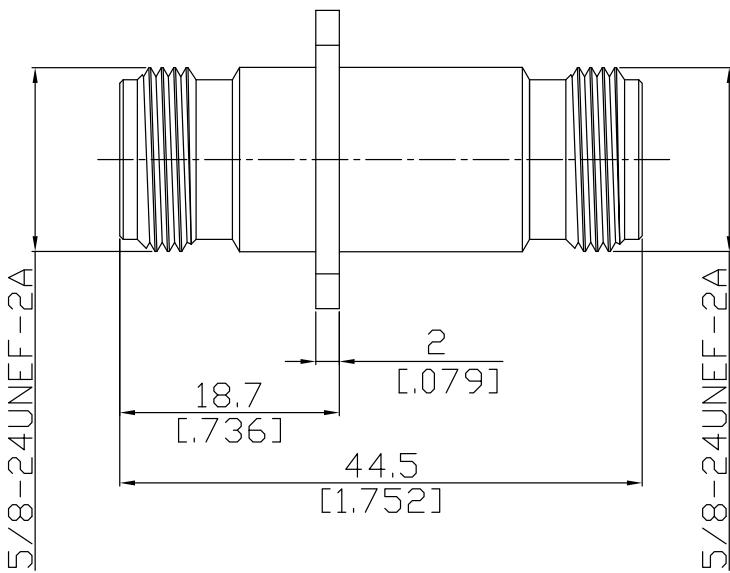

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

According to

IEC 61169-16, MIL-STD-348B/304

## Electrical Data

Impedance	50 Ω
Frequency	DC to 11 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.04 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center contact resistance	≤ 1 mΩ
Outer contact resistance	≤ 0.25 mΩ
Power Handling	1000 W @ 1 GHz
RF Leakage	≥ 128 dB up to 1 GHz
	700 W @ 2 GHz

## Material And Plating

Piece Parts (N)	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	

**N Jack (Female) to N Jack (Female)**  
**Panel 4 Hole Flange Mount Adapter DC-11GHz VSWR1.15**

**AD-N2N25B-PF / H3-H3**

**Mechanical Data**

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	0.7 Nm to 1.1 Nm

**Environmental Data**

Temperature Range	-55 °C to +155 °C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100