

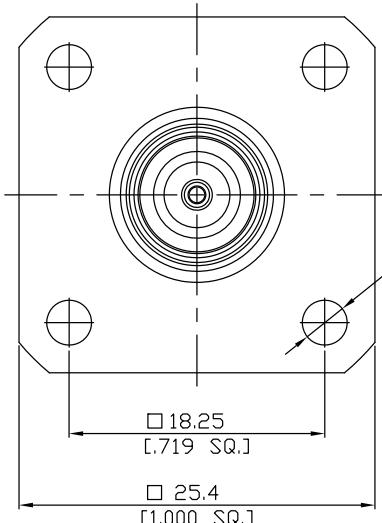


N Jack (female) / TNC Jack (female)
4-Hole Panel Adapter, DC-11 GHz, VSWR ≤ 1.20

AD-N2T25A-PF / 93-93

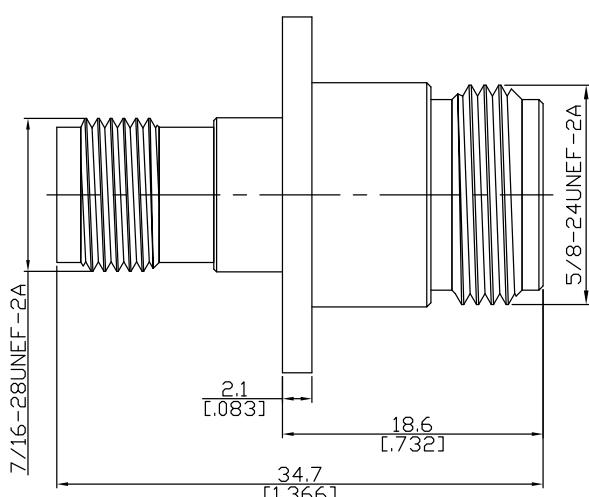

Mounting Dimensions

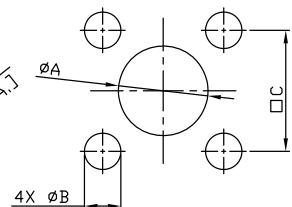

	mm		inch	
	Max.	Min.	Max.	Min.
A	16.2	16.1	0.637	0.633
B	3.4	3.3	0.133	0.129
C	18.3	18.2	0.720	0.716

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N according to IEC 61169-16; MIL-STD-348B/304
 TNC according to IEC 60169-17; MIL-STD-348B/313

Electrical Data

Impedance	50 Ω
Frequency	DC to 11 GHz
VSWR (Return Loss)	≤ 1.20 (≥ 20.83 dB)
Insertion loss	≤ 0.1 x √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Center contact resistance	≤ 1 mΩ, N side
Outer contact resistance	≤ 0.25 mΩ, N side
Working voltage	400 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 80 W @ 2 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	

**N Jack (female) / TNC Jack (female)
4-Hole Panel Adapter, DC-11 GHz, VSWR ≤ 1.20**

AD-N2T25A-PF / 93-93

Mechanical Data

Coupling mechanisms	N side	TNC side
Mating cycles	Screw-lock	Screw-lock
Center contact captivation: axial	min. 500	min. 500
Coupling test torque	≥ 28 N	≥ 28 N
Recommended torque	max. 1.7 Nm	max. 1.7 Nm
	0.7 Nm to 1.1 Nm	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100