


**SMP jack (female) / SMP jack (female) Straight Adaptor
DC- 40 GHz, VSWR \leq 1.50**

AD-P2P25B / 99-99

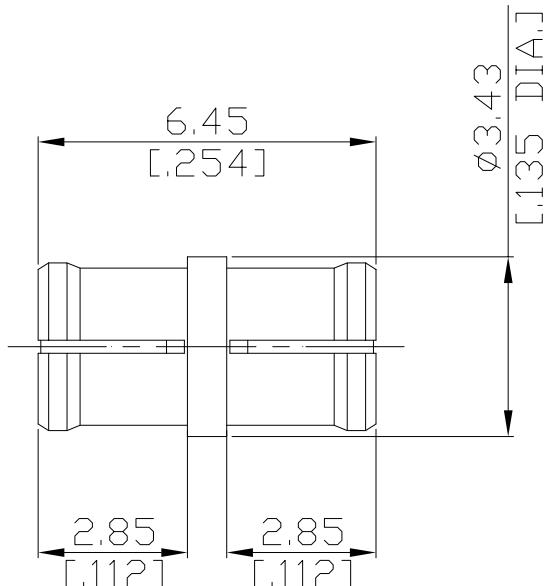

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

MIL-STD-348B/326

Electrical Data

Impedance

50 Ω

Frequency

DC to 40 GHz

VSWR (Return Loss)

26.5 to 40 GHz: typ. < 1.50 (> 13.98 dB)

Insertion Loss

$\leq 0.06 \times \sqrt{f}$ (GHz) dB

Insulation resistance

≥ 5 G Ω

Center contact resistance

≤ 6 m Ω

Outer contact resistance

≤ 2 m Ω

Test voltage

500 V rms

Working voltage

335 V rms

Power handling

65 W @ 2.2 GHz

RF-leakage

≥ 85 dB @ DC to 4 GHz

Material And Plating

Piece Parts (SMP)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Insulator

PTFE

Piece Parts (SMP)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Insulator

PTFE

SMP jack (female) / SMP jack (female) Straight Adaptor
DC- 40 GHz, VSWR \leq 1.50

AD-P2P25B / 99-99

Mechanical Data

Coupling mechanisms	Snap-lock		
Mating cycles	Full detent: \geq 100	Smooth bore: \geq 500	Smooth bore, Catchers mitt: \geq 1000
Center contact captivation: axial	\geq 7 N		
Engagement force	Full detent: \leq 68 N	Limited detent: \leq 45 N	Smooth bore, Catchers mitt: \leq 9 N
Disengagement force	Full detent: \geq 22 N	Limited detent: \geq 9 N	Smooth bore, Catchers mitt: \geq 2.2 N

Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition A
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100