


**SMP jack (female) / SMP jack (female) Straight Adaptor**  
**DC- 26.5 GHz, VSWR  $\leq 1.43$**

**AD-P2P25C / 99-99**

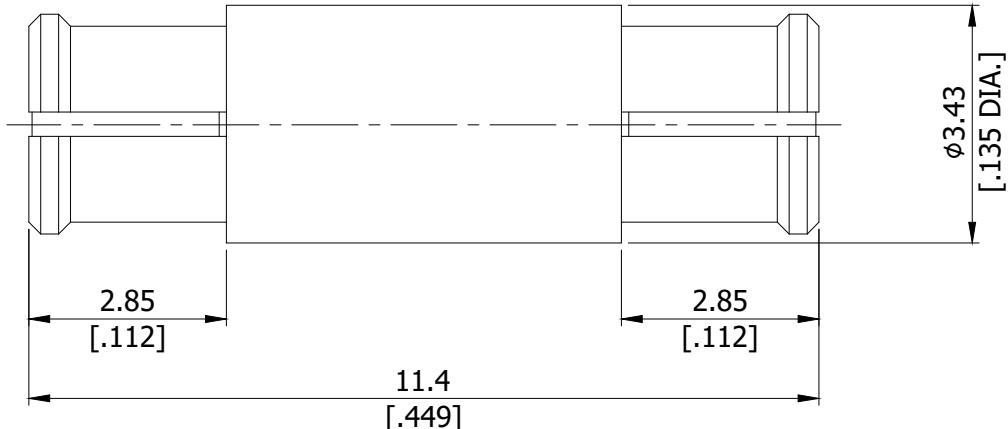

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

MIL-STD-348B/326

**Electrical Data**

Impedance

50  $\Omega$

Frequency

DC to 26.5 GHz

VSWR (Return Loss)

$\leq 1.43$  ( 15 dB)

Insertion Loss

$\leq 0.1 \times \sqrt{f}$  (GHz) dB

Insulation resistance

$\geq 5 \text{ G}\Omega$

Center contact resistance

$\leq 6 \text{ m}\Omega$

Outer contact resistance

$\leq 2 \text{ m}\Omega$

Test voltage

500 V rms

Working voltage

335 V rms

**Material And Plating**

**Piece Parts (SMP)**

**Material**

**Plating**

Centre contact

Beryllium Copper

Gold plating, 3  $\mu$ inch

(Non-magnetic nickel-phosphorus underplating, 80  $\mu$ inch)

Body

Beryllium Copper

Gold plating, 3  $\mu$ inch

(Non-magnetic nickel-phosphorus underplating, 80  $\mu$ inch)

Insulator

PTFE

**Piece Parts (SMP)**

**Material**

**Plating**

Centre contact

Beryllium Copper

Gold plating, 3  $\mu$ inch

(Non-magnetic nickel-phosphorus underplating, 80  $\mu$ inch)

Body

Beryllium Copper

Gold plating, 3  $\mu$ inch

(Non-magnetic nickel-phosphorus underplating, 80  $\mu$ inch)

Insulator

PTFE

**SMP jack (female) / SMP jack (female) Straight Adaptor  
DC- 26.5 GHz, VSWR  $\leq$  1.40**

**AD-P2P25C / 99-99**

**Mechanical Data**

Coupling mechanisms	Snap-lock		
Mating cycles	Full detent: $\geq$ 100	Smooth bore: $\geq$ 500	Smooth bore, Catchers mitt: $\geq$ 1000
Center contact captivation: axial	$\geq$ 7 N		
Engagement force	Full detent: $\leq$ 68 N	Limited detent: $\leq$ 45 N	Smooth bore, Catchers mitt: $\leq$ 9 N
Disengagement force	Full detent: $\geq$ 22 N	Limited detent: $\geq$ 9 N	Smooth bore, Catchers mitt: $\geq$ 2.2 N

**Environmental Data**

Temperature Range	-65°C to +155°C		
Thermal shock	MIL-STD-202, Method 107, Condition B		
Vibration	MIL-STD-202, Method 204, Condition B		
Shock	MIL-STD-202, Method 213, Condition A		
Moisture resistance	MIL-STD-202, Method 106		
RoHS	compliant		

**Packing**

Single or 100