


SMP jack (female) / SMP jack (female) Straight Adaptor
DC- 26.5 GHz, VSWR \leq 1.43

AD-P2P25D / 99-99

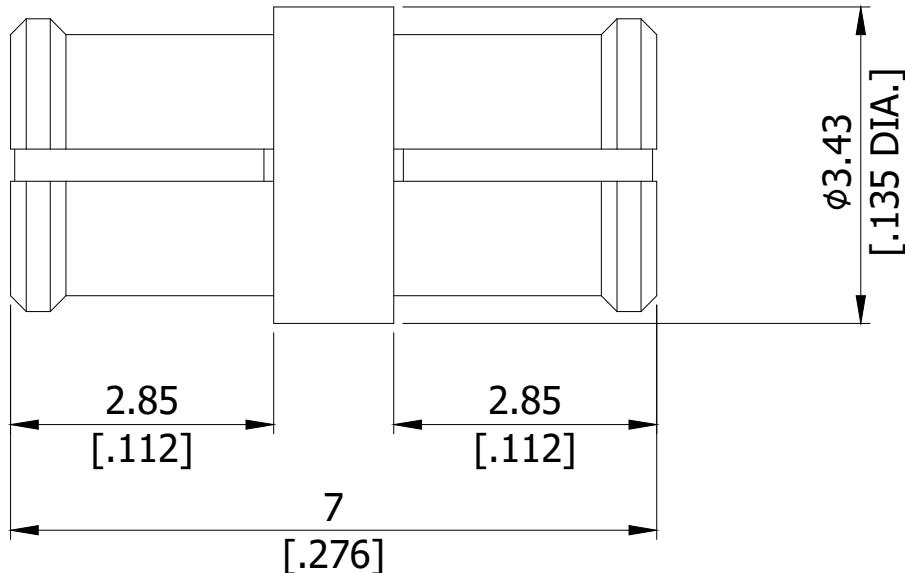

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

MIL-STD-348B/326

Electrical Data

Impedance

50 Ω

Frequency

DC to 26.5 GHz

VSWR (Return Loss)

\leq 1.43 (15 dB)

Insertion Loss

$\leq 0.1 \times \sqrt{f}$ (GHz) dB

Insulation resistance

$\geq 5 \text{ G}\Omega$

Center contact resistance

$\leq 6 \text{ m}\Omega$

Outer contact resistance

$\leq 2 \text{ m}\Omega$

Test voltage

500 V rms

Working voltage

335 V rms

Material And Plating

Piece Parts (SMP)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Insulator

PTFE

Piece Parts (SMP)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Beryllium Copper

Gold plating, 3 μ inch

(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Insulator

PTFE

**SMP jack (female) / SMP jack (female) Straight Adaptor
DC- 26.5 GHz, VSWR ≤ 1.40****AD-P2P25D / 99-99****Mechanical Data**

| | | | |
|-----------------------------------|---------------------|------------------------|-------------------------------------|
| Coupling mechanisms | Snap-lock | | |
| Mating cycles | Full detent: ≥ 100 | Smooth bore: ≥ 500 | Smooth bore, Catchers mitt: ≥ 1000 |
| Center contact captivation: axial | ≥ 7 N | | |
| Engagement force | Full detent: ≤ 68 N | Limited detent: ≤ 45 N | Smooth bore, Catchers mitt: ≤ 9 N |
| Disengagement force | Full detent: ≥ 22 N | Limited detent: ≥ 9 N | Smooth bore, Catchers mitt: ≥ 2.2 N |

Environmental Data

| | |
|---------------------|--------------------------------------|
| Temperature Range | -65°C to +155°C |
| Thermal shock | MIL-STD-202, Method 107, Condition B |
| Vibration | MIL-STD-202, Method 204, Condition B |
| Shock | MIL-STD-202, Method 213, Condition A |
| Moisture resistance | MIL-STD-202, Method 106 |
| RoHS | compliant |

Packing

Single or 100