


SMP jack (female) / SMP jack (female) Straight Adaptor
DC- 26.5 GHz, VSWR \leq 1.43

AD-P2P25G / 99-99

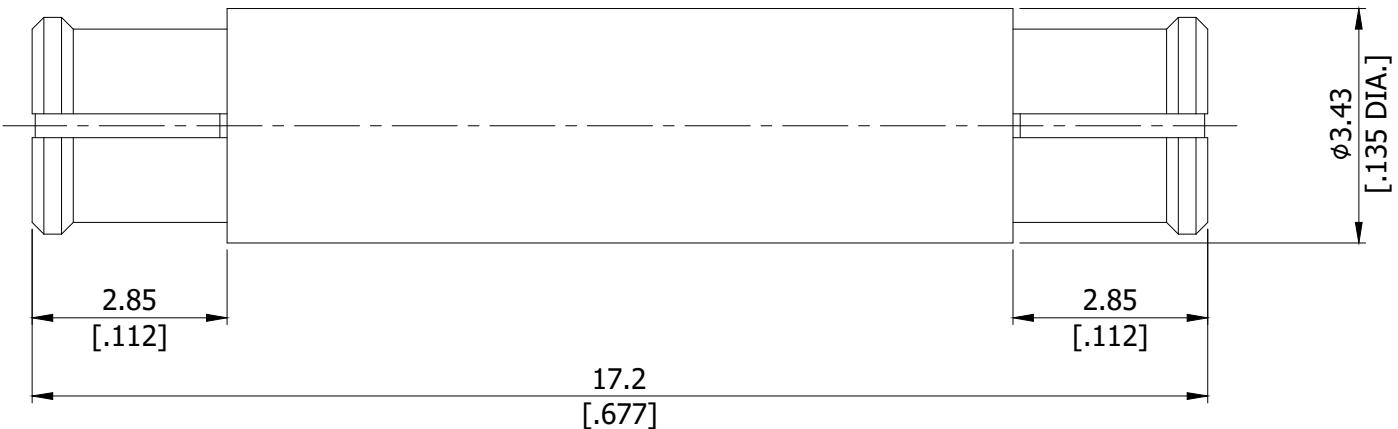

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

MIL-STD-348B/326

Electrical Data

Impedance

50 Ω

Frequency

DC to 26.5 GHz

VSWR (Return Loss)

 \leq 1.43 (15 dB)

Insertion Loss

 $\leq 0.1 \times \sqrt{f}$ (GHz) dB

Insulation resistance

 $\geq 5 \text{ G}\Omega$

Center contact resistance

 $\leq 6 \text{ m}\Omega$

Outer contact resistance

 $\leq 2 \text{ m}\Omega$

Test voltage

500 V rms

Working voltage

335 V rms

Material And Plating**Piece Parts (SMP)****Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 μ inch(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Beryllium Copper

Gold plating, 3 μ inch(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Insulator

PTFE

Piece Parts (SMP)**Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 μ inch(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Body

Beryllium Copper

Gold plating, 3 μ inch(Non-magnetic nickel-phosphorus underplating, 80 μ inch)

Insulator

PTFE

**SMP jack (female) / SMP jack (female) Straight Adaptor
DC- 26.5 GHz, VSWR \leq 1.43****AD-P2P25G / 99-99****Mechanical Data**

Coupling mechanisms	Snap-lock		
Mating cycles	Full detent: \geq 100	Limited detent: \geq 500	Smooth bore, Catchers mitt: \geq 1000
Center contact captivation: axial	\geq 7 N		
Engagement force	Full detent: \leq 68 N	Limited detent: \leq 45 N	Smooth bore, Catchers mitt: \leq 9 N
Disengagement force	Full detent: \geq 22 N	Limited detent: \geq 9 N	Smooth bore, Catchers mitt: \geq 2.2 N

Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition A
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100