


3.5mm Male to Precision N Male Adapter

DC-18GHz VSWR1.15

AD-PC1PCN15A / 9XX-9XX

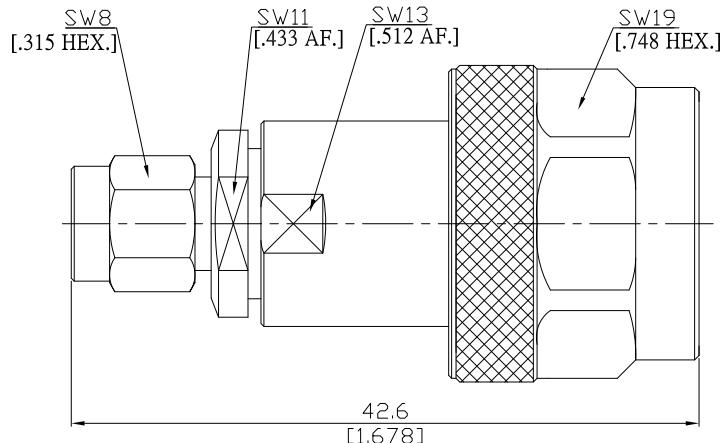

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Mechanically compatible with
According to

3.5mm Side
SMA, 2.92mm
IEC 60169-23; IEEE Std 287

Precision N Side
N/A
IEC 61169-16; MIL-STD 348A/402;
IEEE Std 287

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Test Voltage (at sea level)	1000 V rms
Working Voltage (at sea level)	335 V rms
RF Leakage	≥ 90 dB up to 1 GHz

Material And Plating

Piece Parts (3.5mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PS	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts (Precision N)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PS	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Stainless Steel

3.5mm Male to Precision N Male Adapter
DC-18GHz VSWR1.15

AD-PC1PCN15A / 9XX-9XX

Mechanical Data

Coupling mechanisms	3.5mm Side	Precision N Side
Mating Cycles	Screw-lock	Screw-lock
Center Contact Captivation	≥ 500	≥ 500
Coupling Test Torque	≥ 28 N	≥ 28 N
Recommended Torque	1.70 Nm max.	1.70 Nm max.
	0.9 Nm	1.36 Nm

Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Standard	Single
Weight	N/A