


Precision SMA Plug (Male) to Precision SMA Jack (Female) Adapter
DC-27GHz VSWR1.15

AD-PCA1PCA25B / 9XX-9X

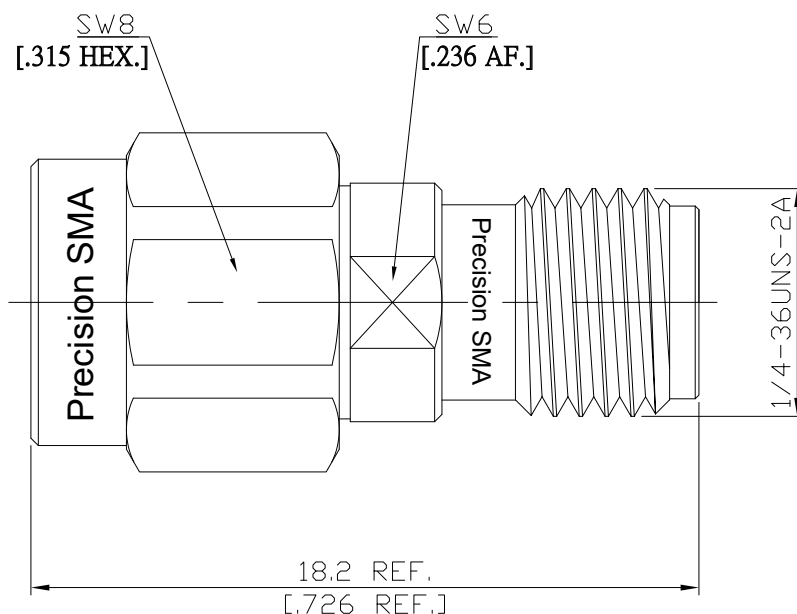

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Mechanically compatible with

2.92mm, 3.5mm

According to

IEC 60169-15, MIL-STD-348B/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 27 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3mΩ

Outer Contact Resistance

≤ 2mΩ

Test Voltage (at sea level)

1000 V rms

Working Voltage (at sea level)

480 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 200 W @ 2 GHz

RF Leakage

≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts (Precision SMA)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE/PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts (Precision SMA)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE/PEI	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:
Date: 3/21/2023

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

Precision SMA Plug (Male) to Precision SMA Jack (Female) Adapter
DC-27GHz VSWR1.15

AD-PCA1PCA25B / 9XX-9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 270 N
Center Contact Captivation: axial	≥ 20 N
radial	≥ 3 N.cm.
Weight	N/A
Coupling Test Torque	1.70 Nm max.
Recommended Torque	0.9 Nm

Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100