


## Precision SMA Plug (Male) to Precision SMA Jack (Female) Adapter DC-27GHz VSWR1.15

### AD-PCA1PCA25D / 111-11

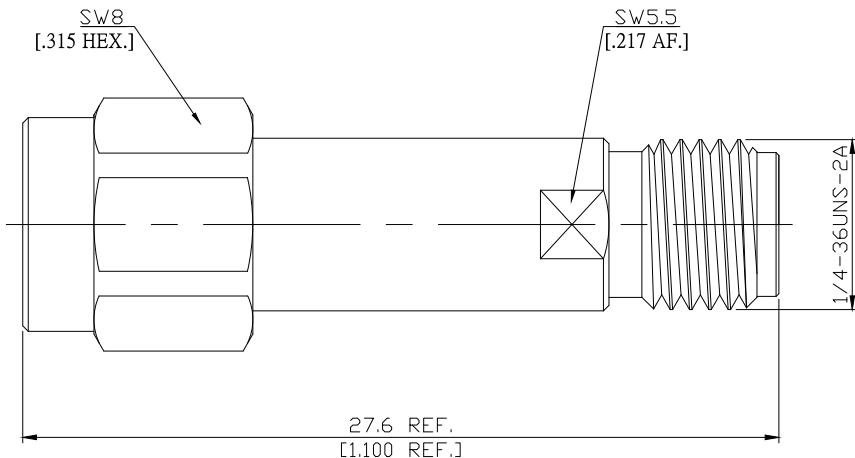

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

Mechanically compatible with  
According to

2.92mm, 3.5mm  
IEC 60169-15, MIL-STD-348B/310

#### Electrical Data

Impedance	50 Ω
Frequency	DC to 27 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.04 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 3mΩ
Outer Contact Resistance	≤ 2mΩ
Test Voltage (at sea level)	1000 V rms
Working Voltage (at sea level)	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz
RF Leakage	≥ 100 dB up to 1 GHz

#### Material And Plating

Piece Parts (Precision SMA)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel/Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Piece Parts (Precision SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:  
9/15/2018

Rosnol RF/Microwave Technology Co., Ltd.

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

## Precision SMA Plug (Male) to Precision SMA Jack (Female) Adapter DC-27GHz VSWR 1.15

AD-PCA1PCA25D / 111-11

## Mechanical Data

## Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100