


Precision SMA jack (female) / Precision SMA jack (female)
DC-27 GHz, VSWR ≤ 1.15

AD-PCA2PCA25A-BH / 91-91

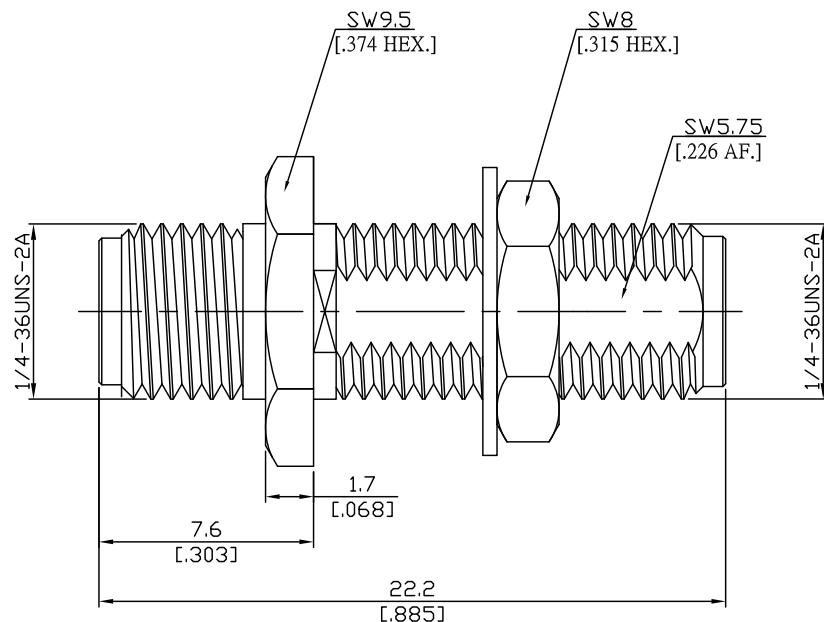

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 61169-8; MIL-STD-348B/301

Electrical Data

Impedance

50 Ω

Frequency

DC to 27 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 3 mΩ

Outer contact resistance

≤ 2 mΩ

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

Precision SMA jack (female) / Precision SMA jack (female)
DC-27 GHz, VSWR ≤ 1.15

AD-PCA2PCA25A-BH / 91-91

Material And Plating

Piece Parts (Precision SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Fastening nut	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Washer	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Piece Parts (Precision SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 27 N
radial	≥ 3 Ncm
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65 °C to +165 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100