


Precision N Plug (Male) to Precision N Plug (Male)
Adaptors Straight DC-18 GHz VSWR1.15

AD-PCN1PCN15B / 9XX-9XX

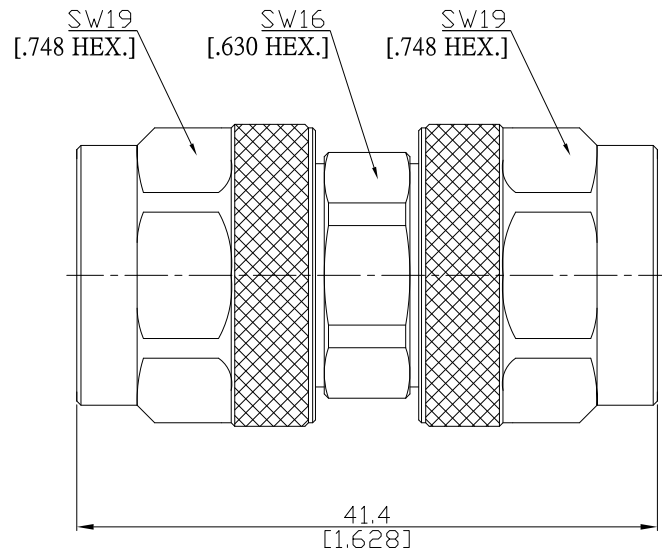

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
Insertion Loss	≤ 1.15 (≥ 23.12 dB)
Insertion loss	$\leq 0.05 \times \sqrt{f}$ (GHz) dB
Insulation resistance	≥ 5 G Ω
Center contact resistance	≤ 1.0 m Ω
Outer contact resistance	≤ 1.0 m Ω
Test voltage	2500 V rms
Working voltage	1000 V rms
RF-leakage	≥ 90 dB up to 1 GHz
Dielectric Withstanding Voltage	1000 VRMS
RF High Potential Withstanding Voltage:	670 VRMS

Material And Plating

Piece Parts (Precision N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Coupling nut	Stainless Steel	Passivated
Piece Parts (Precision N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Coupling nut	Stainless Steel	Passivated

Precision N Plug (Male) to Precision N Plug (Male)
Adaptors Straight DC-18 GHz VSWR1.15

AD-PCN1PCN15B / 9XX-9XX

Mechanical Data

Coupling Mechanisms	Screw-lock
Mating Cycles	≥ 500
Center contact captivation: axial	≥ 28 N
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.7 Nm to 1.0 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Single or 100