



Precision N jack (female) / Precision N jack (female) Bulkhead Adaptor
DC-18 GHz, VSWR ≤ 1.30

AD-PCN2PCN25B-BH / 93-93

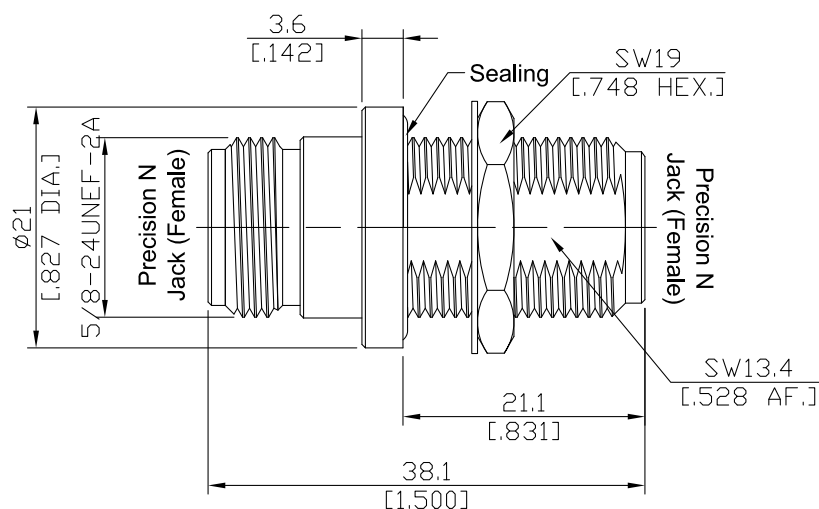

Mounting Dimension



	mm		inch	
	Max.	Min.	Max.	Min.
A	16.1	16	.634	.630
B	13.7	13.6	.539	.535

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 61169-8; MIL-STD-348B/301

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	≤ 1.30 (> 17.69 dB)
Insertion Loss	≤ 0.05 × √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Working voltage	1000 V rms
Test voltage	2500 V rms
RF-leakage	≥ 90 dB up to 1 GHz

Material And Plating

Piece Parts (Precision N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Brass	Nickel
Washer	Brass	Nickel
Piece Parts (Precision N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Nickel
Insulator	PTFE	

Precision N jack (female) / Precision N jack (female) Bulkhead Adaptor
DC-18 GHz, VSWR ≤ 1.30

AD-PCN2PCN25B-BH / 93-93

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 28 N
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.70 Nm to 1.0 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Single or 100