


Precision TNC plug (male) to SMA jack (female) Adapter
DC-18GHz VSWR1.2

AD-PCT1A25C / 9XX-9X

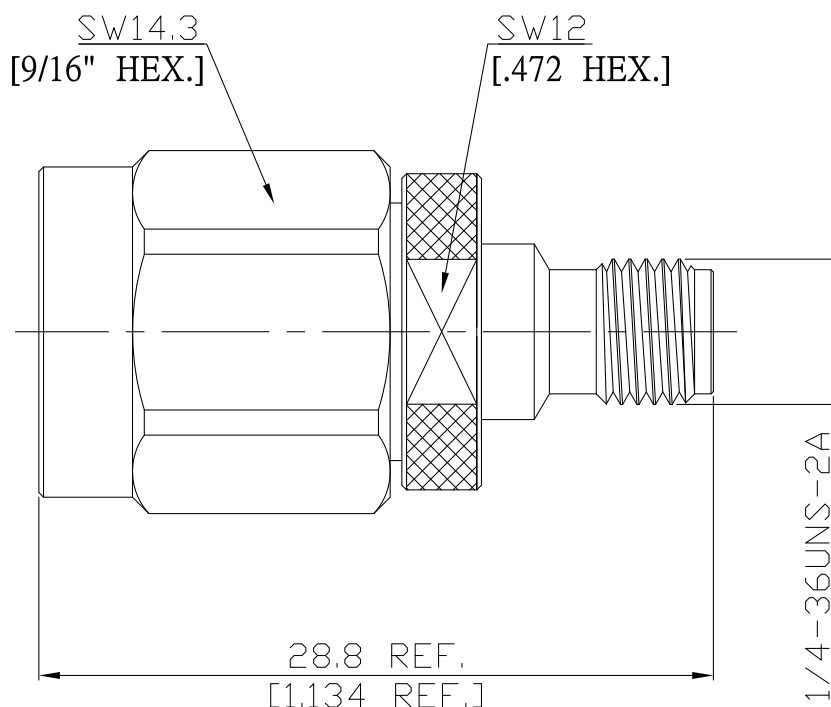

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Precision TNC according to
SMA according to

IEC 60169-26; MIL-STD-348B/313
IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.83 dB)

Insertion Loss

≤ 0.1 x √F (GHz) dB

Material And Plating

Piece Parts (Precision TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

Precision TNC plug (male) to SMA jack (female) Adapter
DC-18GHz VSWR1.2

AD-PCT1A25C / 9XX-9X

Mechanical Data

	Precision TNC Side	SMA Side
Coupling mechanisms	Screw-lock	Screw-lock
Mating cycles	min. 500	min. 500
Center Contact Captivation	≥ 27 N	≥ 27 N
Coupling test torque	max. 1.7 Nm	max. 1.7 Nm
Recommended torque	0.46 Nm to 0.69 Nm	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +160°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100