


SMP plug (male) Full detent / 2.92mm Jack (Female)
Adapter DC-40 GHz VSWR1.25

AD-PF1K25A / 9X-9X

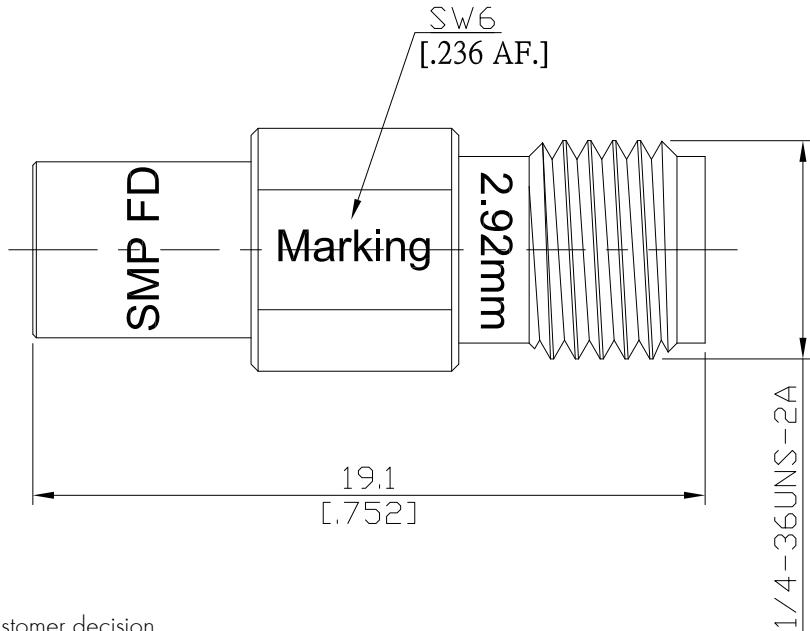

Marking Details:

Laser marking depending on customer decision

1. Rosnol Logo
2. OEM Logo
3. Blank

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMP side according to MIL-STD-348B/326
2.92mm side according to IEC 61169-35

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.25 (≥ 19.08 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Insulation resistance	≥ 5 GΩ

Material And Plating

Piece Parts (SMP)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PS	
Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PS	

SMP plug (male) Full detent / 2.92mm Jack (Female)
Adapter DC-40 GHz VSWR1.25

AD-PF1K25A / 9X-9X

Mechanical Data

Coupling mechanisms	SMP (Full detent) Side	2.92mm Side
Mating Cycles	Snap-on	Screw-lock
Center contact captivation axial	≥ 100	min. 500
Coupling test torque	≥ 7 N	≥ 20 N
Recommended torque	N/A	1.70 Nm
Engagement force	N/A	0.80 Nm to 1.10 Nm
Disengagement force	68 N max.	N/A
	22 N min.	N/A

Environmental Data

Temperature Range	-60°C to +100°C
RoHS	compliant

Packing

Single or 100