


Bullet Adapter SMPM Jack(female) to SMPM Jack(female)
DC- 28 GHz , VSWR 1.35

AD-PM2PM25A-BL30 / 99-99

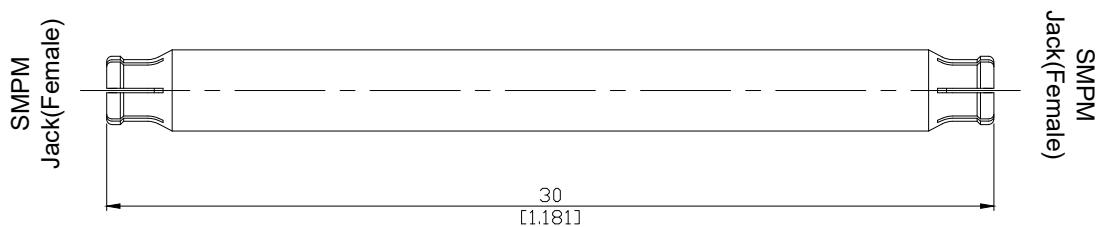

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

MIL-STD-348B/328

Electrical Data

Impedance

50 Ω

Frequency

DC to 28 GHz

VSWR (Return Loss)

≥ 23 dB, DC to 18 GHz

≥ 16.5 dB, 18 to 28 GHz

≤ 0.1 x √F (GHz) dB

Insertion Loss

≥ 5 GΩ

Insulation resistance

≤ 6 mΩ

Center contact resistance

≤ 2 mΩ

Outer contact resistance

325 V rms

Material And Plating

Piece Parts (SMPM)

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μinch

(Non-magnetic nickel-phosphorus underplating, 80 μinch)

Body

Beryllium Copper

Gold plating, 3 μinch

(Non-magnetic nickel-phosphorus underplating, 80 μinch)

Insulator

PTFE

Piece Parts (SMPM)

Plating

Centre contact

Beryllium Copper

Gold plating, 3 μinch

(Non-magnetic nickel-phosphorus underplating, 80 μinch)

Body

Beryllium Copper

Gold plating, 3 μinch

(Non-magnetic nickel-phosphorus underplating, 80 μinch)

Insulator

PTFE

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:

JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

Bullet Adapter SMPM Jack(female) to SMPM Jack(female)
DC- 28 GHz , VSWR 1.35

AD-PM2PM25A-BL30 / 99-99

Mechanical Data

Coupling mechanisms	Snap-lock	
Mating cycles	Full detent: ≥ 100	Smooth bore: ≥ 500
Center contact captivation: axial	≥ 7 N	
Engagement force	Full detent: 19 N typical	Smooth bore: 11 N typical
Disengagement force	Full detent: 29 N typical	Smooth bore: 7 N typical

Environmental Data

Temperature Range	-55°C to +155°C	
Thermal shock	MIL-STD-202, Method 107, Condition B	
Vibration	MIL-STD-202, Method 204, Condition B	
Shock	MIL-STD-202, Method 213, Condition A	
Moisture resistance	MIL-STD-202, Method 106	
RoHS	compliant	

Packing

Single or 100