


SMPM jack (female) / SMPM jack (female) Straight Adaptor DC- 65 GHz

AD-PM2PM25C / 99-99

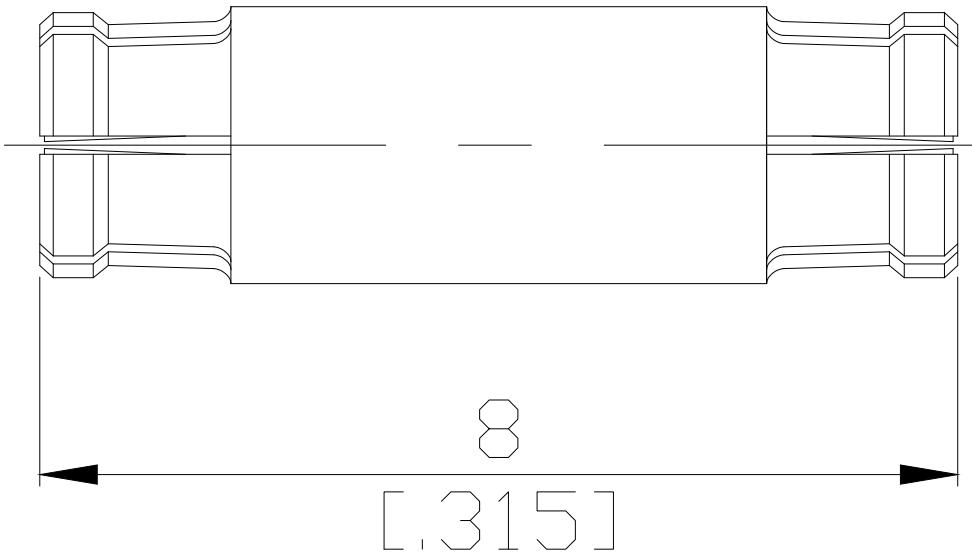

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

MIL-STD-348B/328

Electrical Data

Impedance

50 Ω

Frequency

DC to 65 GHz

VSWR (Return Loss)

≥ 26 dB, DC to 18 GHz

≥ 15 dB, 18 to 26.5 GHz

≥ 13 dB, 26.5 to 50 GHz

≤ 0.1 x √f (GHz) dB

Insertion Loss

≥ 5 GΩ

Insulation resistance

≤ 6 mΩ

Center contact resistance

≤ 2 mΩ

Outer contact resistance

325 V rms

Working voltage

Material And Plating**Piece Parts (SMPM)****Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

Piece Parts (SMPM)**Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

SMPM jack (female) / SMPM jack (female) Straight Adaptor DC- 65 GHz

AD-PM2PM25C / 99-99

Mechanical Data

Coupling mechanisms	Snap-lock	
Mating cycles	Full detent: ≥ 100	Smooth bore: ≥ 500
Center contact captivation: axial	≥ 7 N	
Engagement force	Full detent: 19 N typical	Smooth bore: 11 N typical
Disengagement force	Full detent: 29 N typical	Smooth bore: 7 N typical

Environmental Data

Temperature Range	-55°C to +155°C	
Thermal shock	MIL-STD-202, Method 107, Condition B	
Vibration	MIL-STD-202, Method 204, Condition B	
Shock	MIL-STD-202, Method 213, Condition A	
Moisture resistance	MIL-STD-202, Method 106 compliant	

Packing

Single or 100