




2.4mm Plug (Male) to 2.4mm Plug (Male) Adapter
DC-50GHz VSWR1.2

AD-Q1Q15A / 9XX-9XX

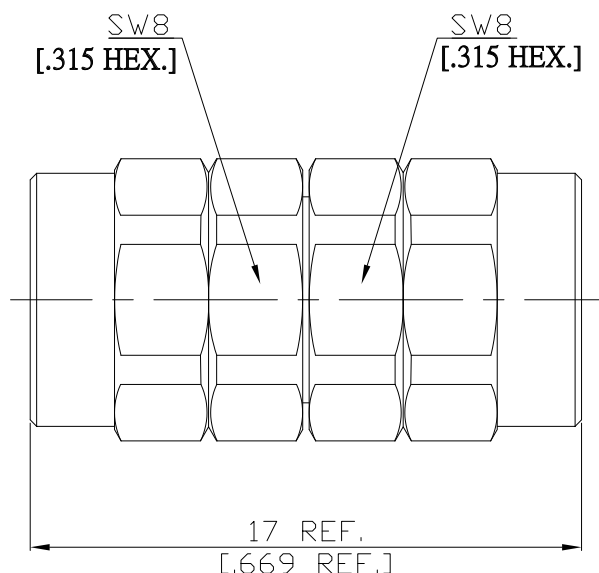

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Mechanically compatible with

1.85mm

According to

IEC 61169-40, IEEE Std 287-2007

Electrical Data

Impedance

50 Ω

Frequency

DC to 50 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

$\leq 0.05 \times \sqrt{F}$ (GHz) dB

Insulation Resistance

≥ 5 G Ω

Test Voltage (at sea level)

500 V rms

Working Voltage (at sea level)

150 V rms

RF Leakage

≥ 100 dB up to 1 GHz

Power Handling

16W

Material And Plating

Piece Parts (2.4mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts (2.4mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
MAY/26/2025

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

2.4mm Plug (Male) to 2.4mm Plug (Male) Adapter
DC-50GHz VSWR1.2

AD-Q1Q15A / 9XX-9XX

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.65 Nm max.
Recommended Torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture Resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Single or 100