


2.4mm Jack (Female) to 2.92mm Jack (Female)
Panel 4 Hole Flange Mount Adapter DC-40GHz VSWR1.15

AD-Q2K25A-PF / 9X-9X

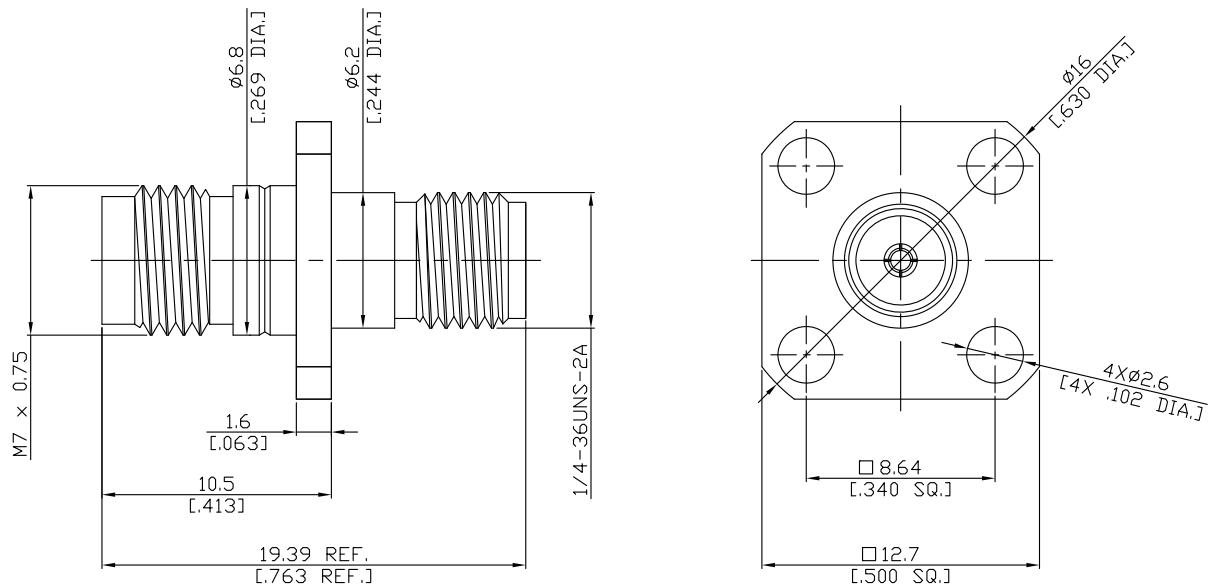

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

2.4mm according to IEC 61169-40; MIL-STD-348B/324
2.92mm according to IEC 61169-35

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Test voltage	500 V rms
Working voltage	150 V rms
RF-leakage	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts (2.4mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Stainless Steel	Passivated
Insulator	PS	
Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Stainless Steel	Passivated
Insulator	PS	

**2.4mm Jack (Female) to 2.92mm Jack (Female)
Panel 4 Hole Flange Mount Adapter DC-40GHz VSWR1.15**

AD-Q2K25A-PF / 9X-9X

Mechanical Data

Coupling mechanisms	2.4mm side	2.92mm side
Mating cycles	Screw-lock	Screw-lock
Center contact captivation	≥ 500	≥ 500
Coupling test torque	≥ 20 N	≥ 20 N
Recommended torque	1.65 Nm	1.70 Nm
	0.80 Nm to 1.10 Nm	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100