


2.4mm Snap-On plug (male) / 2.92mm jack (female)
Straight Adaptor DC-40 GHz, VSWR ≤ 1.15

AD-QQ1K25A / 99X-9X

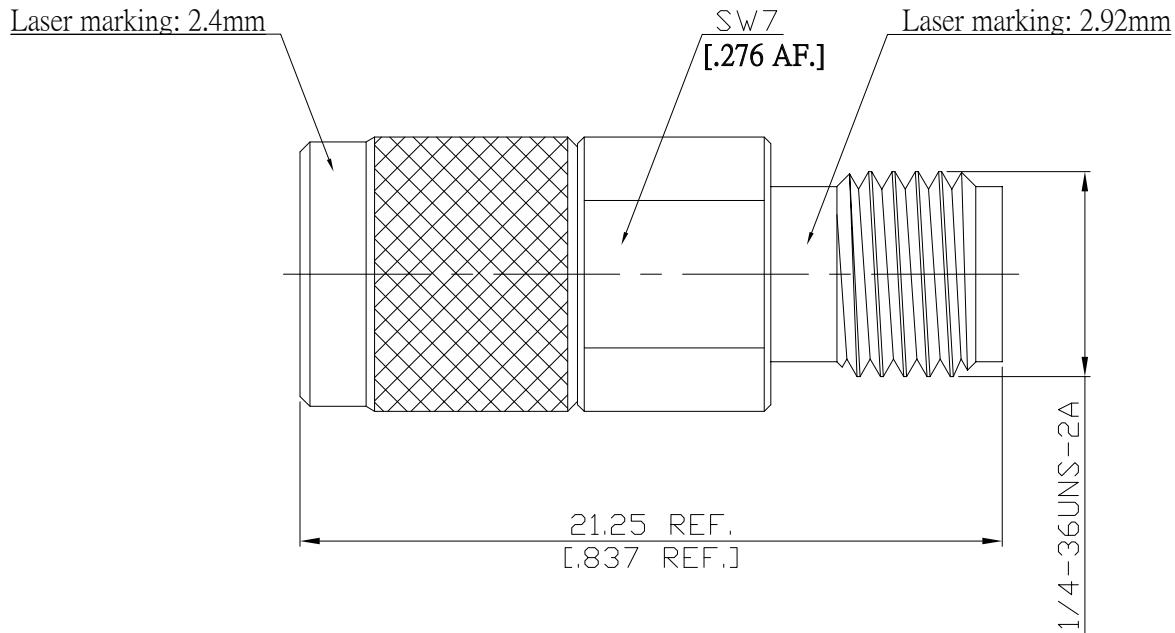

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

2.4mm Snap-On according to
2.92mm according to

IEC 61169-40
IEC 61169-35

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.1 dB)
Insertion Loss	$\leq 0.05 \times \sqrt{F}$ (GHz) dB
Insulation resistance	≥ 5 G Ω
Test voltage	500 V rms
Working voltage	150 V rms
RF-leakage	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts (2.4mm Snap-On)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Insulator	PEI	
Coupling nut	Stainless Steel	Passivated
Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PEI	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-
Date:
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page
1/2

2.4mm Snap-On plug (male) / 2.92mm jack (female)
Straight Adaptor DC-40 GHz, VSWR ≤ 1.15

AD-QQ1K25A / 99X-9X

Mechanical Data

Coupling mechanisms	2.4mm side	2.9mm side
Mating cycles	Snap-lock	Screw-lock
Center contact captivation	≥ 500	≥ 500
Coupling test torque	≥ 20 N	≥ 20 N
Recommended torque	1.65 Nm	1.70 Nm
	0.80 Nm to 1.10 Nm	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100