



SMB Plug (Male) to BNC Jack (Female)
Bulkhead Seal Adapter DC-4 GHz VSWR1.35

AD-S1B25A-BHS / 933-93

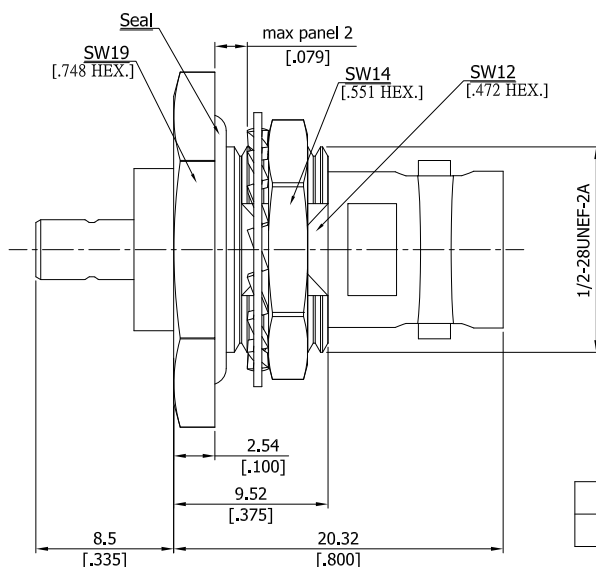

	mm		inch	
	Max.	Min.	Max.	Min.
A	12.6	12.55	.496	.494
B	12.1	12.05	.476	.474

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMB side according to

IEC 60169-10; MIL-STD-348B/311

BNC side according to

DIN EN 61169-8; MIL-STD-348B/301

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.35 (≥ 16.54 dB)

Insertion Loss

$\leq 0.05 \times \sqrt{F}$ (GHz) dB

Insulation Resistance

≥ 1 G Ω

Center Contact Resistance

≤ 5 m Ω , SMB side

≤ 1 m Ω , N side

Outer Contact Resistance

≤ 2.5 m Ω , SMB side

≤ 0.25 m Ω , N side

Test voltage

750 V rms

Working voltage

250 V rms

Contact current

1.5 A DC typ.

RF-leakage

55 dB up to 1 GHz

Material And Plating

Piece Parts (SMB)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Brass	Nickel
Insulator	PTFE	
Coupling nut	Brass	Nickel
Piece Parts (BNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Brass	Nickel
Insulator	PTFE	

SMB Plug (Male) to BNC Jack (Female)
Bulkhead Seal Adapter DC-4 GHz VSWR1.35

AD-S1B25A-BHS / 933-93

Mechanical Data

	SMB Side	BNC Side
Coupling mechanisms	Snap-On	Bayonet
Mating Cycles	min. 500	min. 500
Center contact captivation: axial	≥ 10 N	≥ 10 N
Engagement force	≤ 63 N	N/A
Disengagement force	8 N min. to 63 N max.	N/A

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Meth. 107, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100