


SMB plug (male) / N jack (female)
Adapter DC-4 GHz VSWR1.35

AD-S1N25A / 911-94

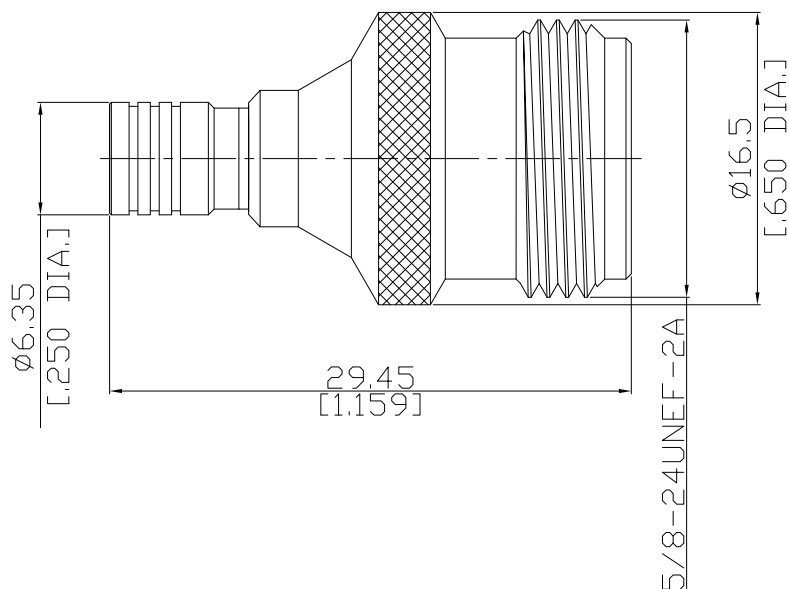

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMB side according to

IEC 60169-10; MIL-STD-348B/311

N side according to

IEC 61169-16; MIL-STD-348B/301

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.35 (≥ 16.54 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 1 GΩ

Center Contact Resistance

≤ 5 mΩ, SMB side

≤ 1 mΩ, N side

Outer Contact Resistance

≤ 2.5 mΩ, SMB side

≤ 0.25 mΩ, N side

Test voltage

750 V rms

Working voltage

250 V rms

Contact current

1.5 A DC typ.

RF-leakage

55 dB up to 1 GHz

Material And Plating

Piece Parts (SMB)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Brass	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Insulator	PTFE	
Coupling nut	Brass	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

SMB plug (male) / N jack (female)
Adapter DC-4 GHz VSWR1.35

AD-S1N25A / 911-94

Mechanical Data

	SMB Side	N Side
Coupling mechanisms	Snap-On	Screw-lock
Mating Cycles	min. 500	min. 500
Center contact captivation: axial	≥ 10 N	≥ 10 N
Engagement force	≤ 63 N	N/A
Disengagement force	8 N min. to 63 N max.	N/A
Coupling test torque	N/A	max. 1.7 Nm
Recommended torque	N/A	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Meth. 107, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100